


DropTop™ Max Light

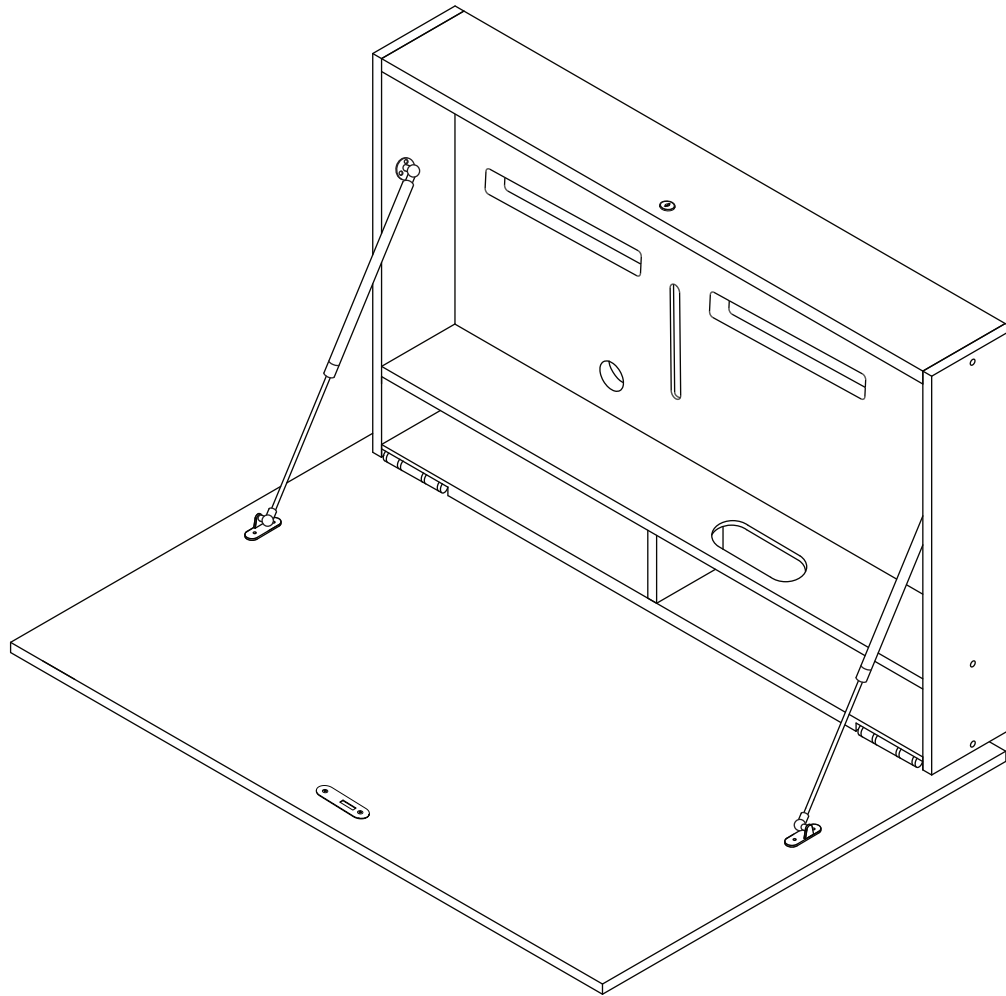

Assembly & Installation Instructions

DropTop™ Max Light


Assembly & Installation Guidelines

Please read and follow these instructions carefully to ensure the correct assembly and installation of your DropTop™ wall-mounted desk. Failure to adhere to the instructions may result in product damage, personal injury, or voiding of the product warranty.

Before You Begin:


- Remove the contents from the package and place them on a protective surface to prevent damage.
- Compare the package contents with the Supplied Parts List to ensure all components are intact and undamaged.
- Thoroughly read and review all instructions provided in your DropTop™ Installation guide before beginning assembly.

If you encounter any issues or have questions during the assembly process, please contact our customer support team for assistance.

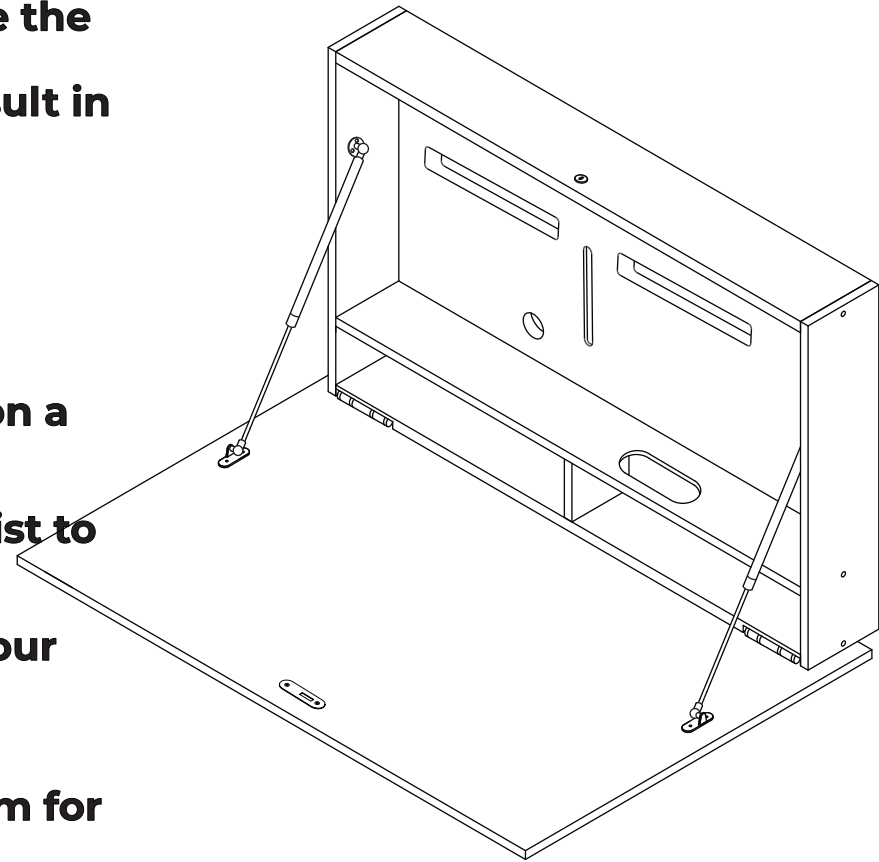


DropTop™ Max Light Fixings Pack

1



x23
+ 2 Extra

2




x18
+1 Extra

3




x7 +1 Extra




x7 +1 Extra


4

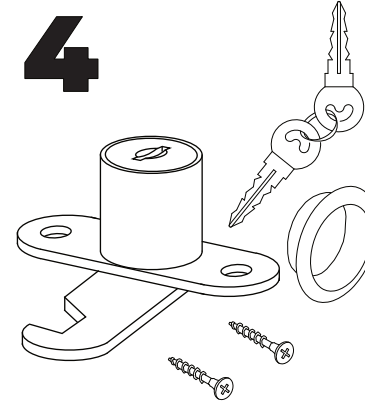


5-2



6




7

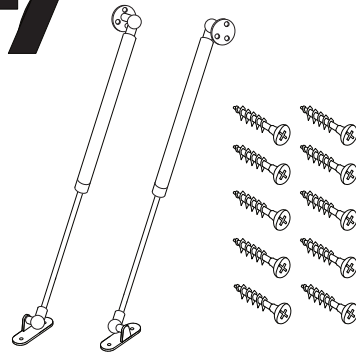

A

Plasterboard Wall
Fixings




x3

x3

B

Brick/Concrete Wall
Fixings




x6


x6

Tools

***included**







1 x 4mm Allen Key












1 x 25mm Spade bit.
For a Plasterboard Wall

***Not included**



DropTop™ Max Light Parts

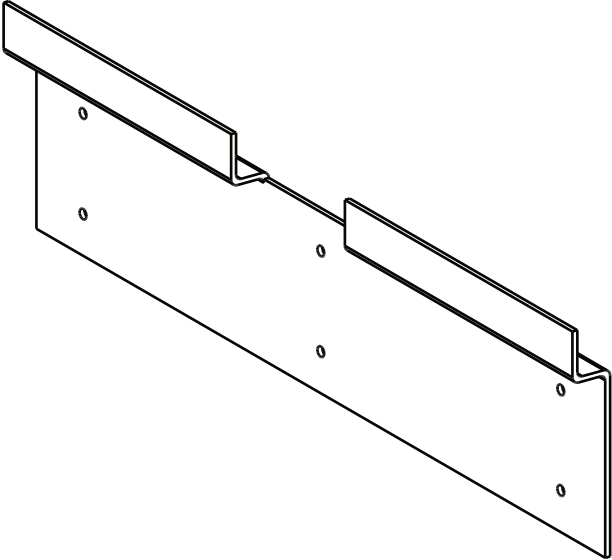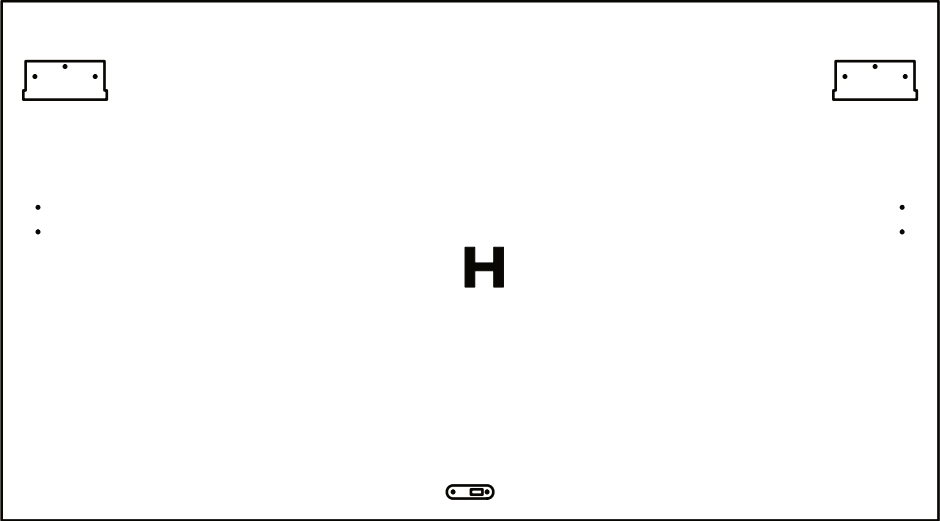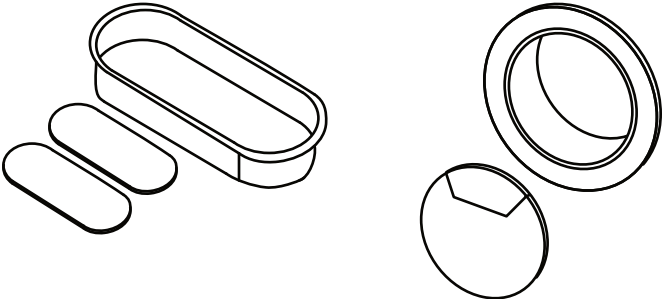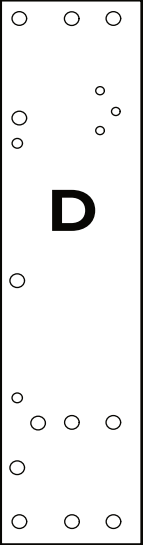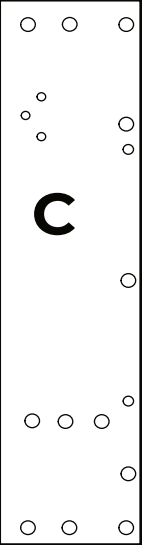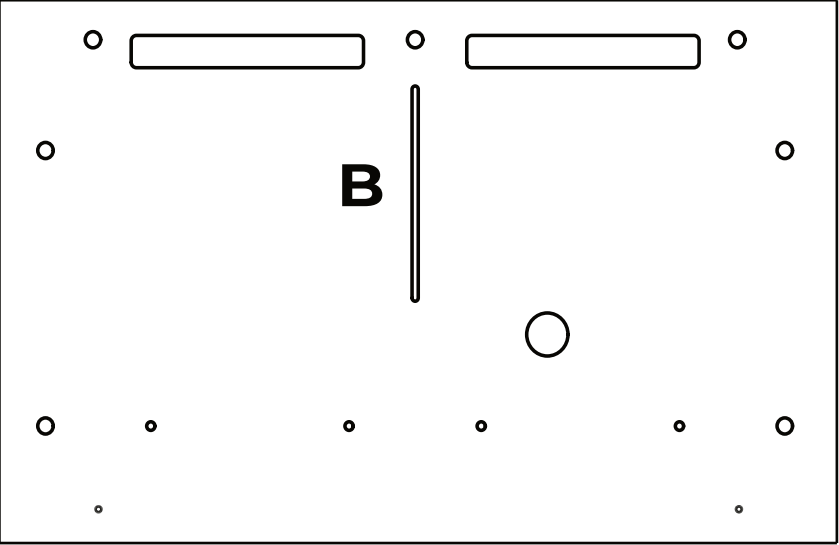

DropTop™ Max Light dimensions

Exterior dimensions when Closed:

Height: 72cm

Width: 100cm

Depth: 15.8cm

Worktop Dimensions:

Width: 100cm


Depth: 59.7cm

The Max Light supports up to 50kg in weight



Weight - 25kg

To safely mount your DropTop™, it is recommended that two people assist with the installation

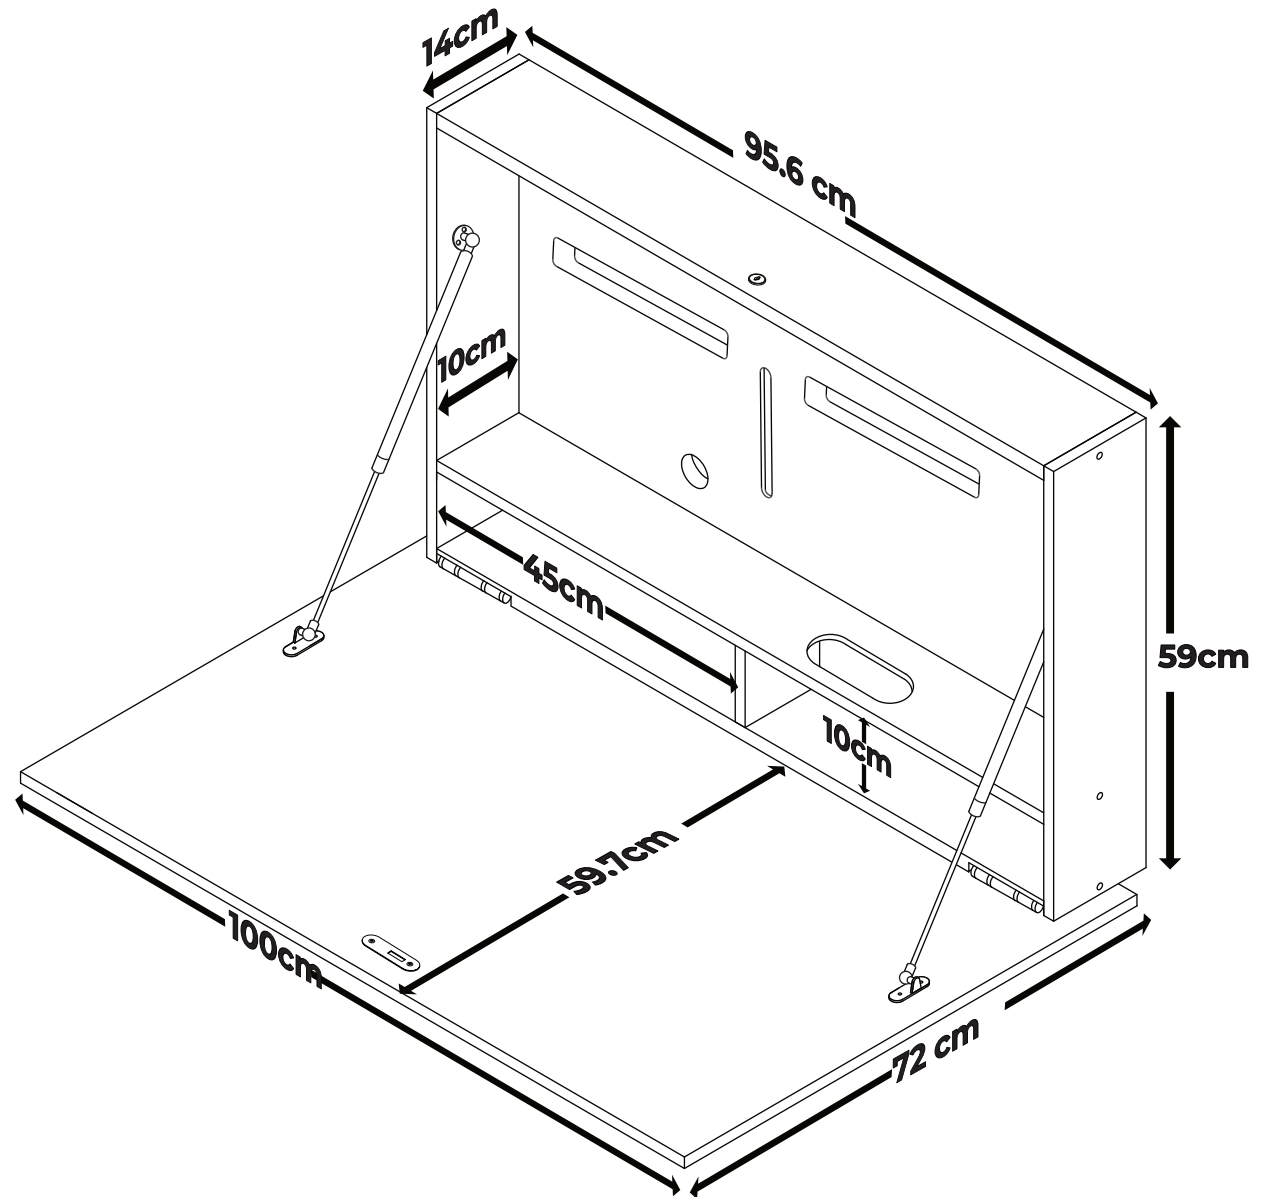

DropTop™ Max Light Monitor space dimensions

The Max Light is designed to house a 27-inch or a 34-inch Ultrawide monitor.

Available Monitor Space dimensions:

Height: 42cm


Width: 87.5cm

Depth: Please see note below*

!

Please note that the available monitor space depth will vary based on your chosen Monitor Mount

Monitor Mount	Depth available
Extendable	5cm
Tilt	6cm
Slim	8cm

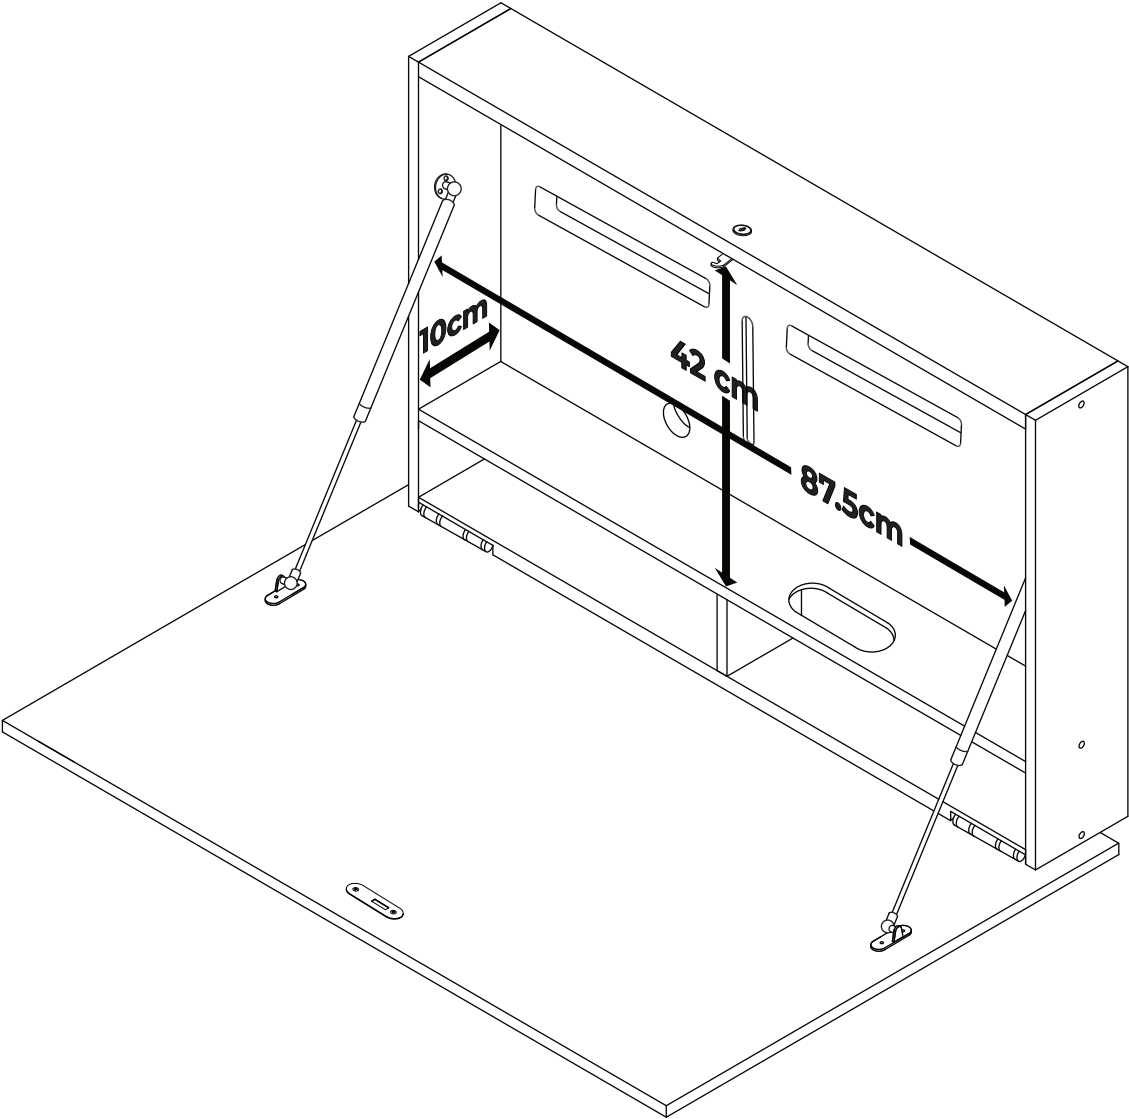



Monitor Mounts.

Your DropTop™ Light will include one of the following monitor brackets, depending on your order configuration.

Extendable Arm Mount

Depth: 5cm


**The recommended
maximum depth
for your monitor is 5cm**

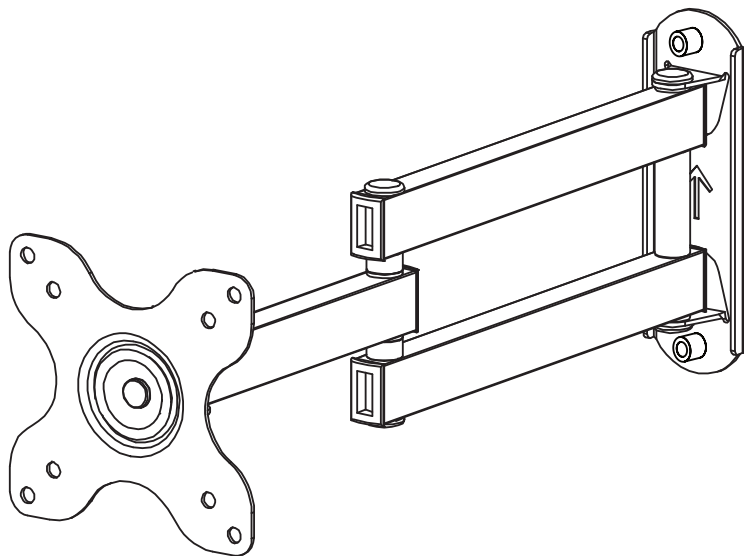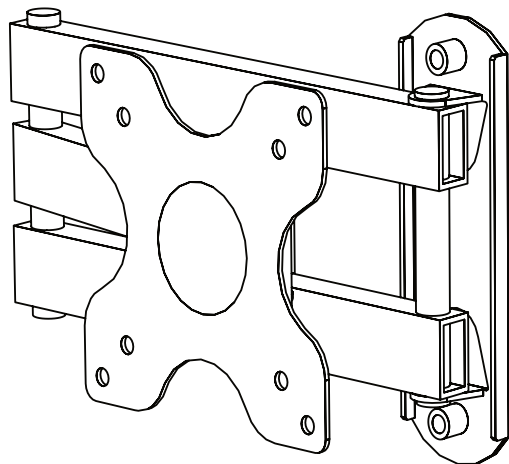

Slim Mount

Depth: 1.3cm


**The recommended
maximum depth
for your monitor is 8cm**

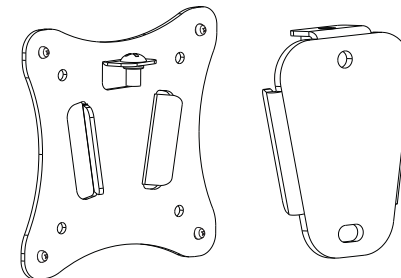

Tilt Mount


Depth: 3.3cm

**The recommended
maximum depth
for your monitor is 6cm**

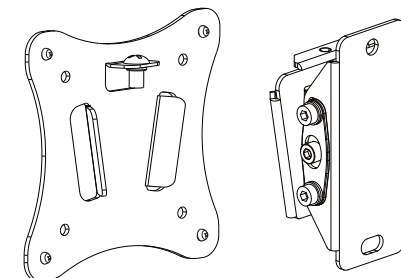


**Ensure your monitor supports VESA
75x75mm or 100x100mm standards and
check the advised depth for each mount.**

DropTop™ Max Light Wall Plate dimensions.

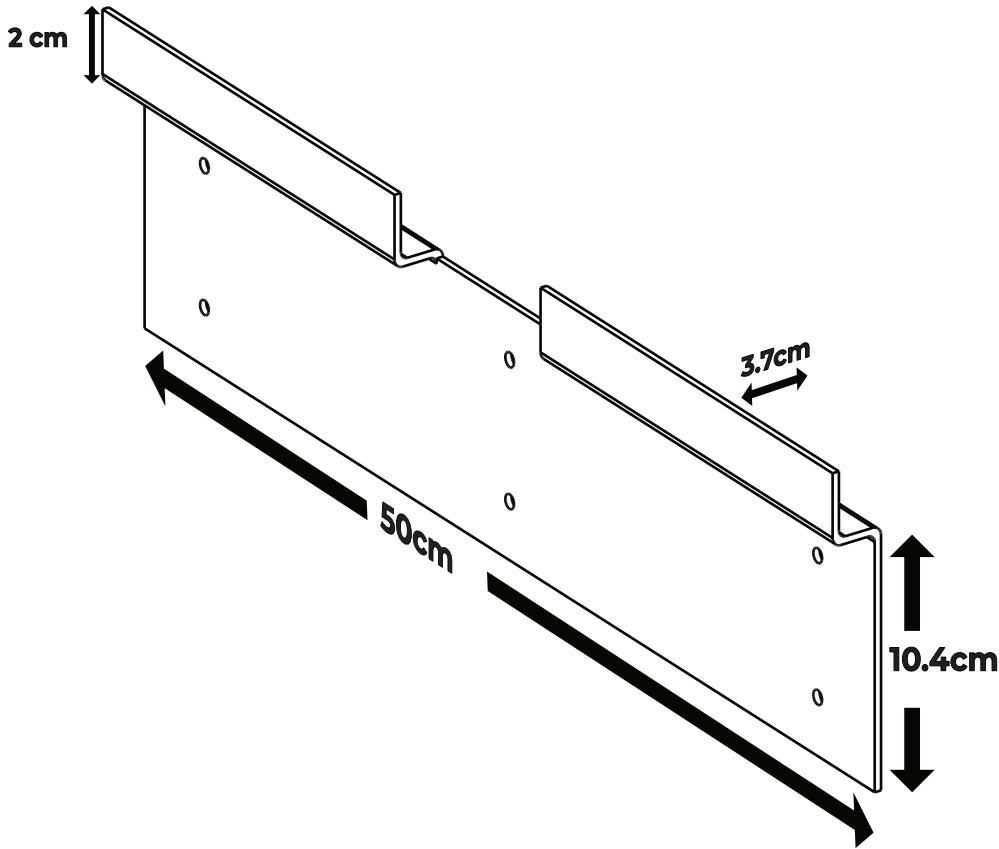

DropTop™ Max Light Cable Management



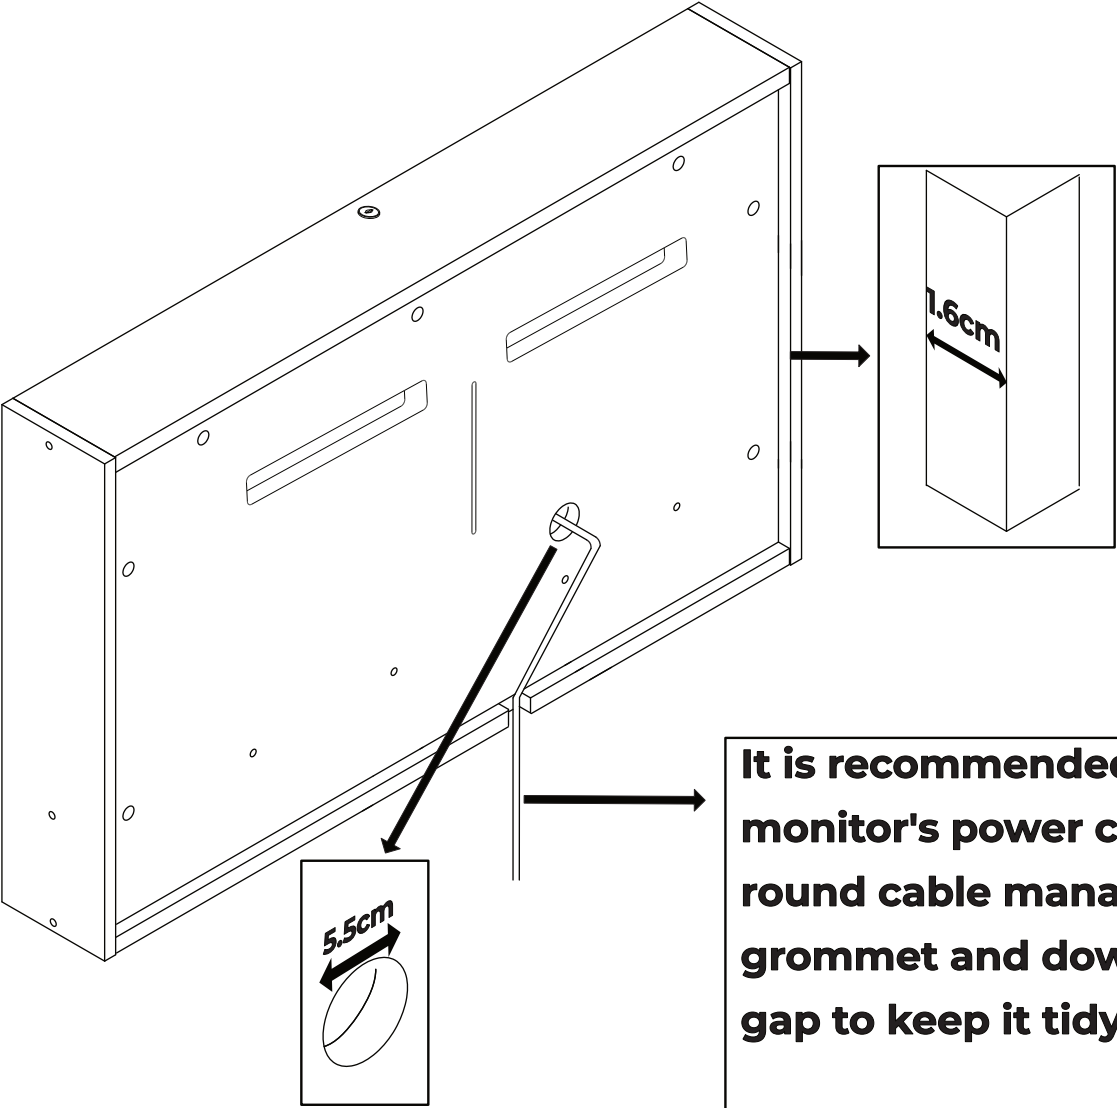


The Max Light is designed with a back recess depth of 1.6cm. This allows for any cables to be fed tidily behind the DropTop

It is recommended to feed the monitor's power cable through round cable management grommet and down between the gap to keep it tidy.



DropTop™ Max Light Assembly

1

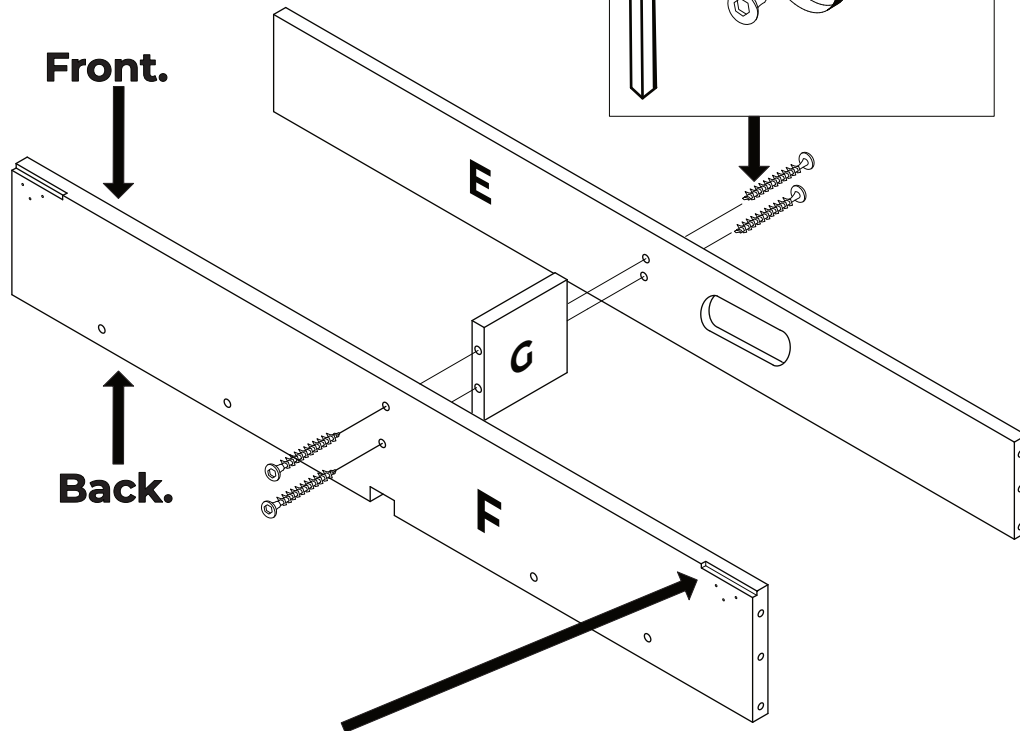


Ensure that part F is correctly oriented before assembly, as shown.


2

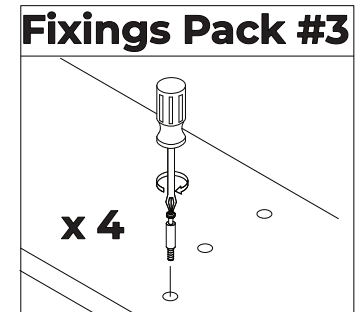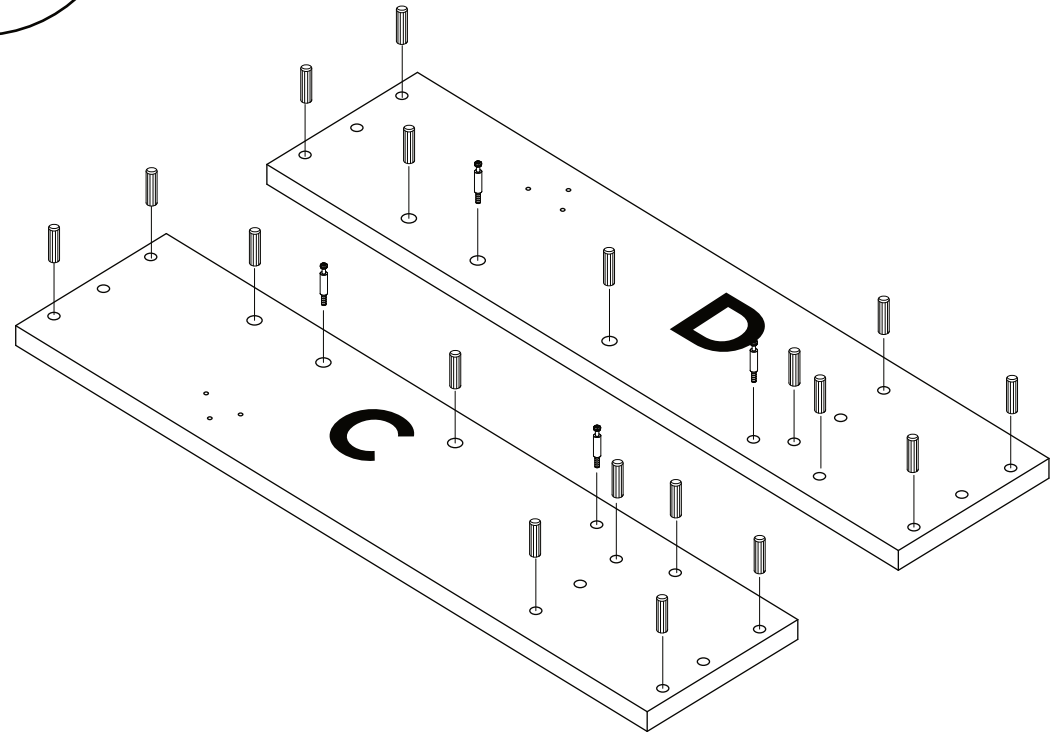


3

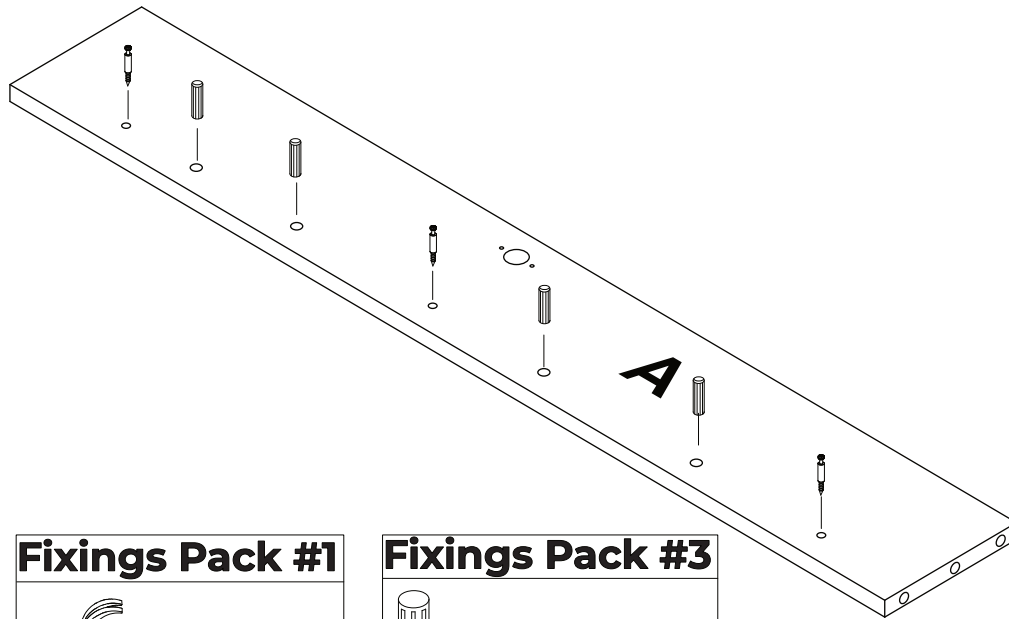


Fixings Pack #1




Fixings Pack #3




4

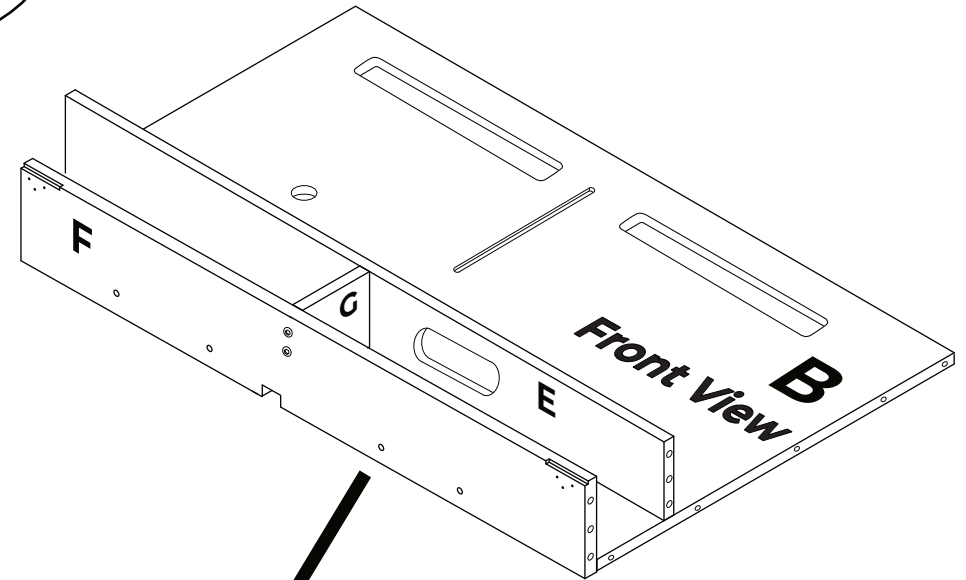

Front View

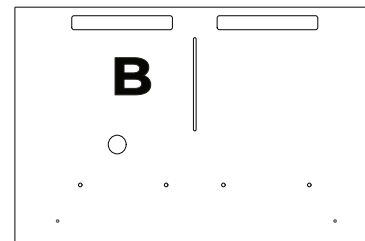


Back View

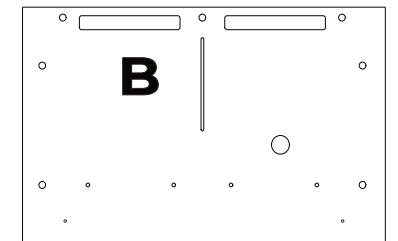


At this step, Ensure Part B is facing frontwards, as illustrated, not backwards at this stage


5

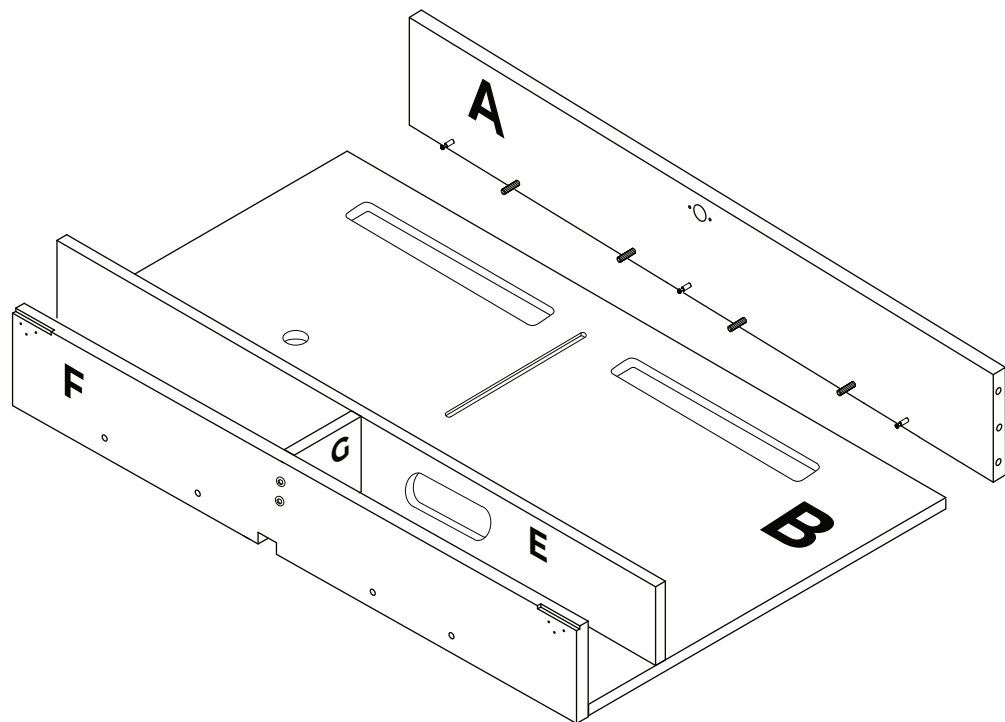

6


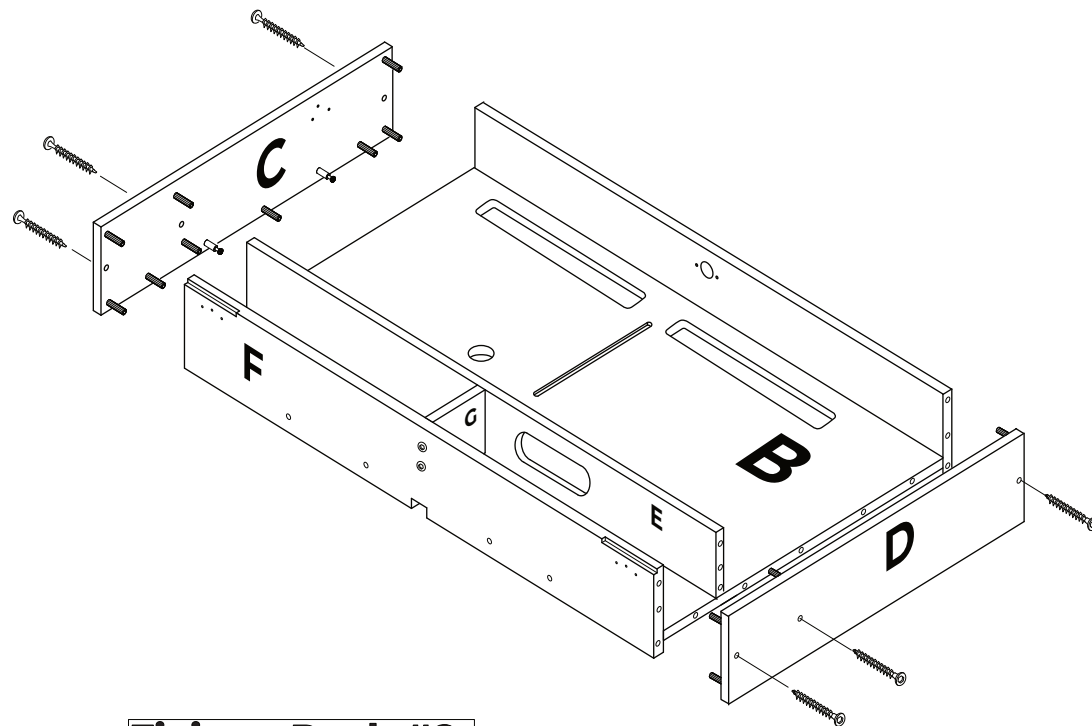


Fixings Pack #2




7

Fixings Pack #3

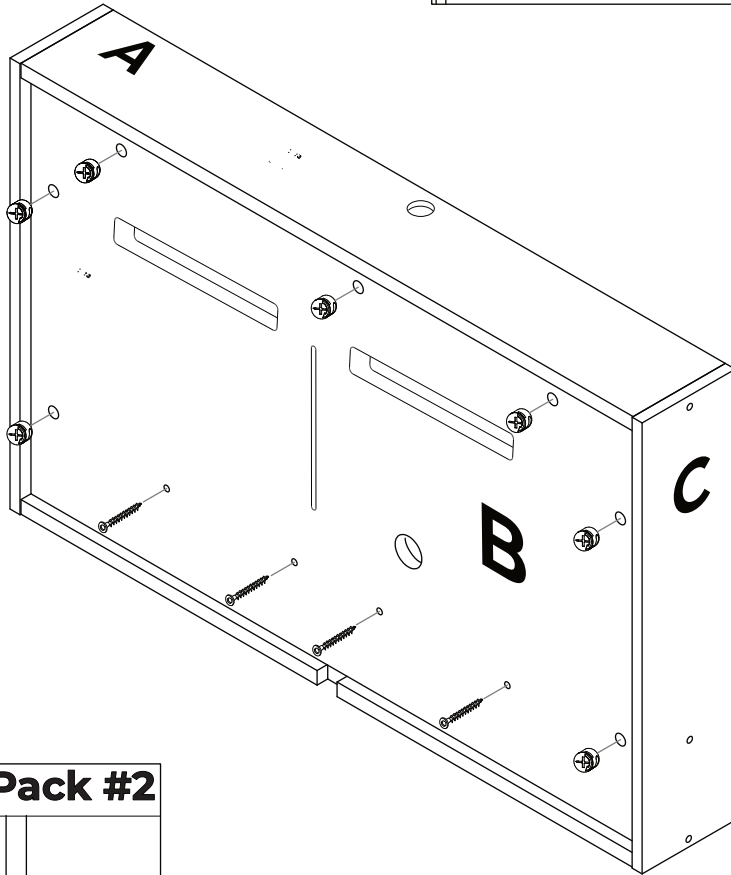


Back View

Fixings Pack #2




8


Fixings Pack #2

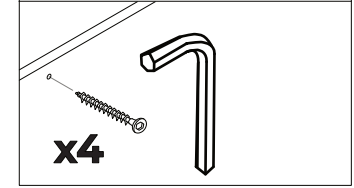

Lay part H down flat, then place the assembled component from Step 7 on top, aligning it with the hinge recesses.


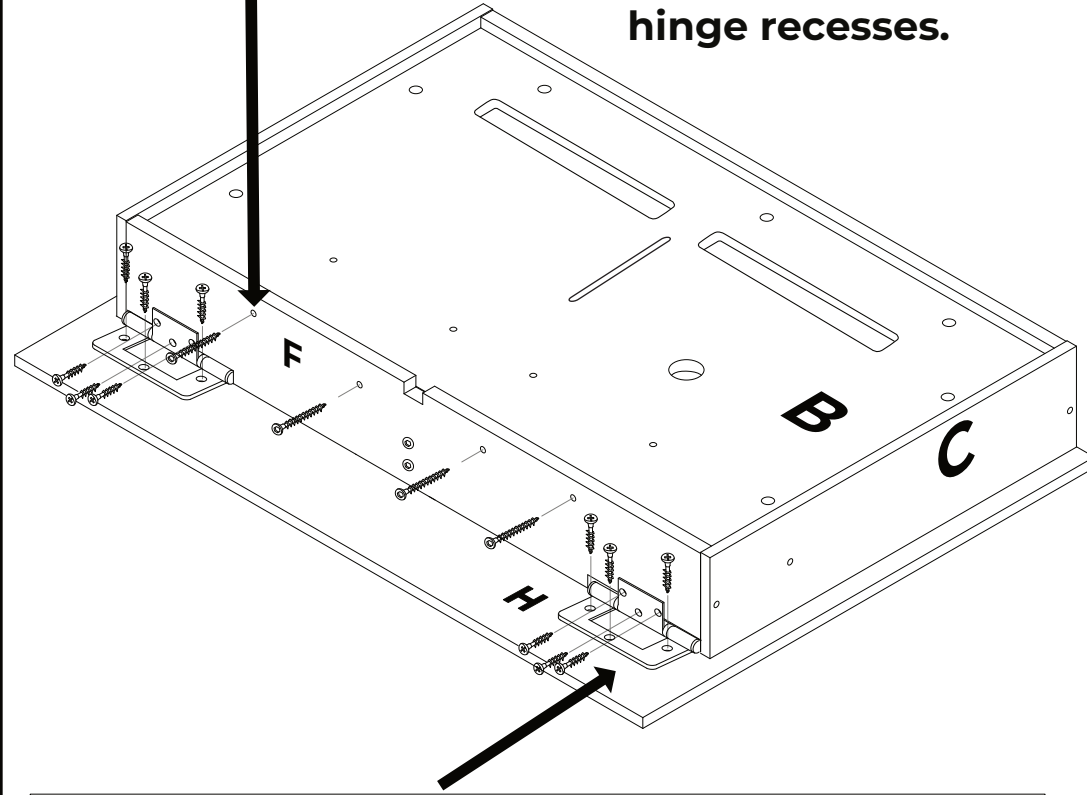


Fixings Pack #5-2

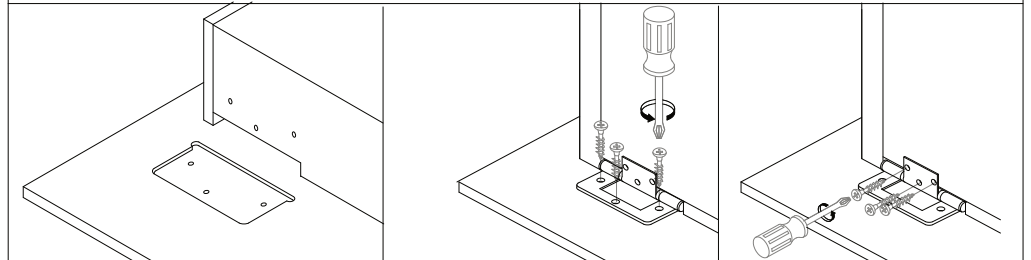

9


Fixings Pack #7

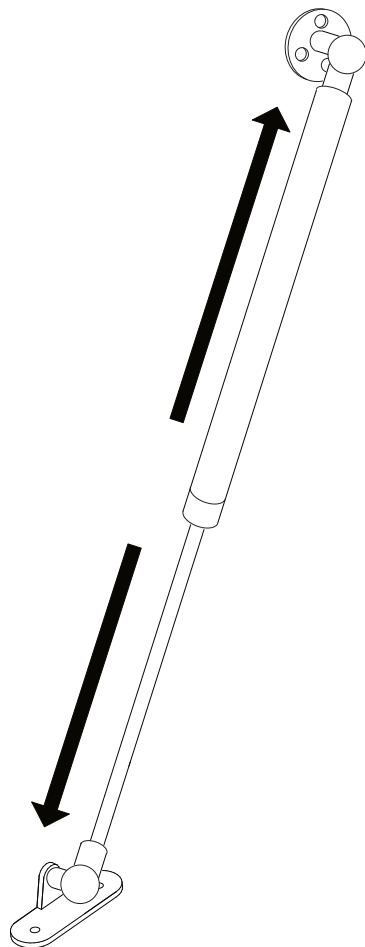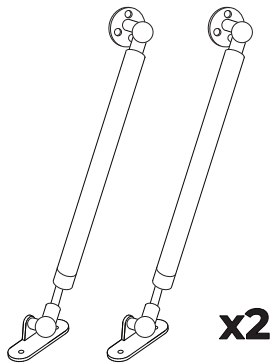


Fully extend the soft opening stays by pulling on each end.

10


Fixings Pack #7




Fixings Pack #7





Fixings Pack #6



Spheres must point inwards




Fixings Pack #7

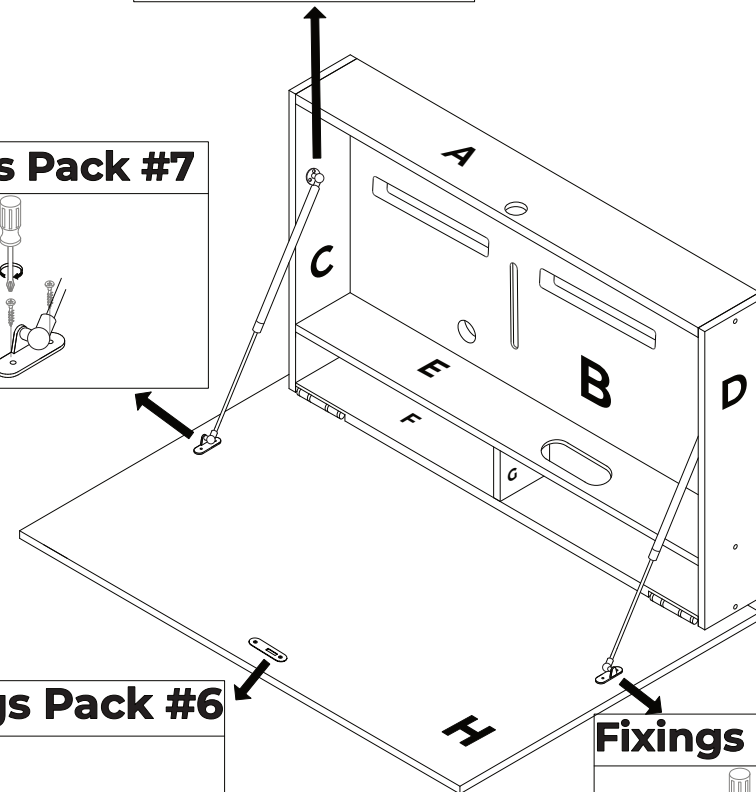


11


Fixings Pack #4



x1

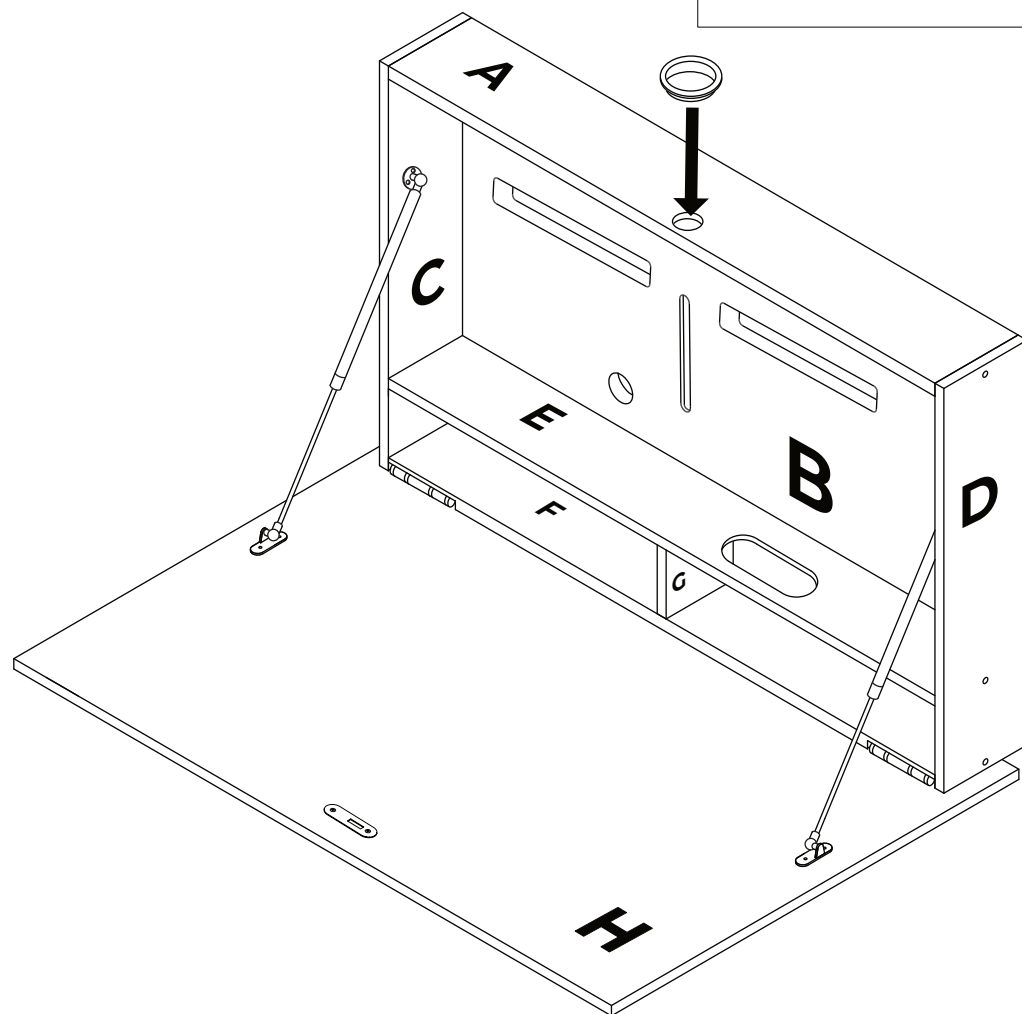


12

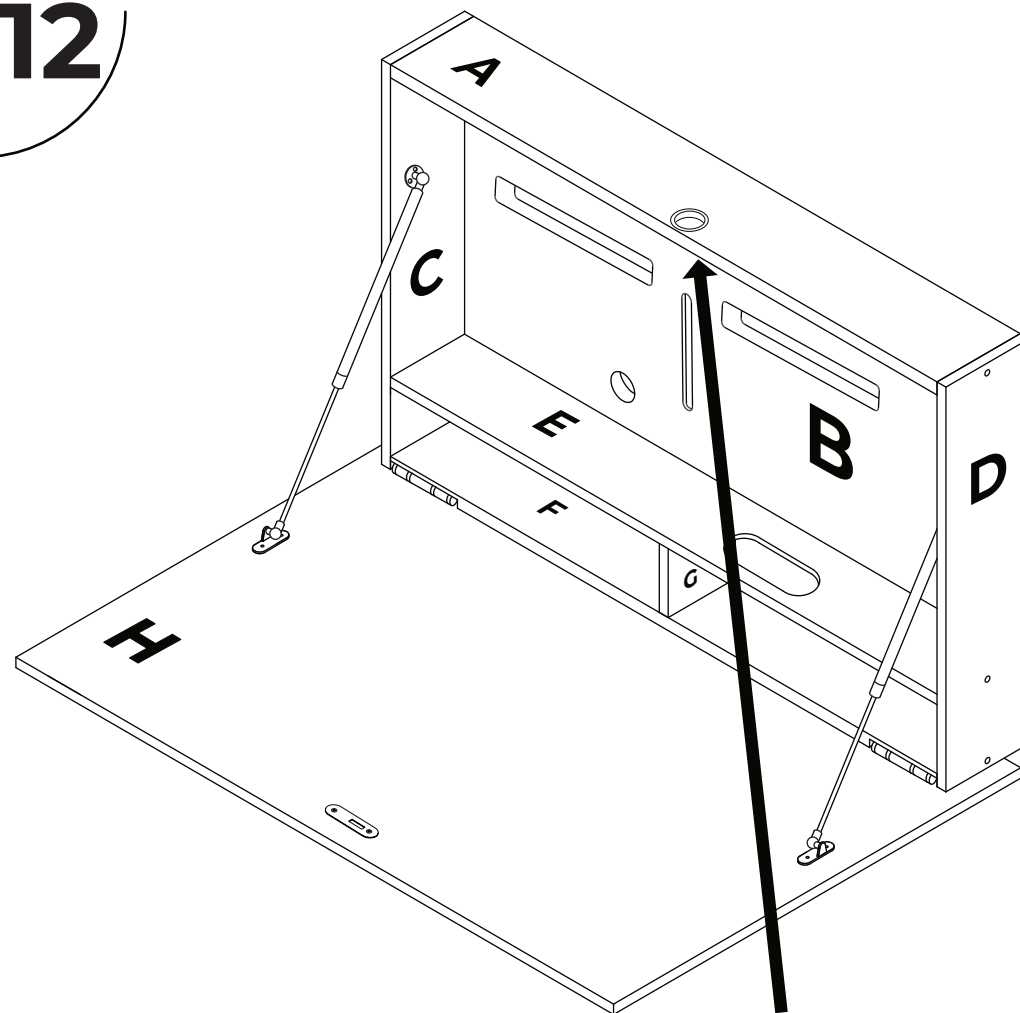

Fixings Pack #4

A




x2




13

Oval Cable management grommet.



1. Place the two slender metal discs into the black oval ring, aligning them correctly.

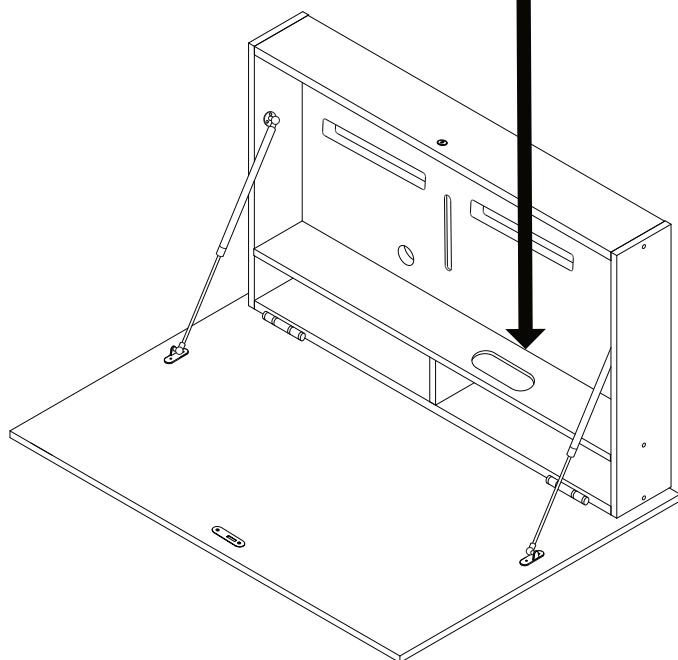


2. Slot the assembled cable management unit into the oval recess



14

Round Cable management grommet.


1. Push out the central section of the circular cable grommet. You'll use it later.

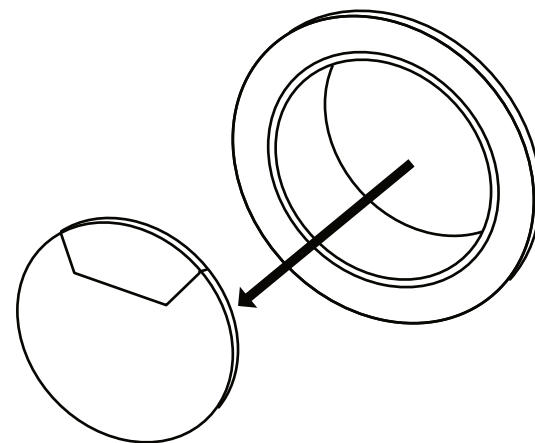

2. Fit the outer ring of the cable grommet into part B's circular recess, aligning it carefully

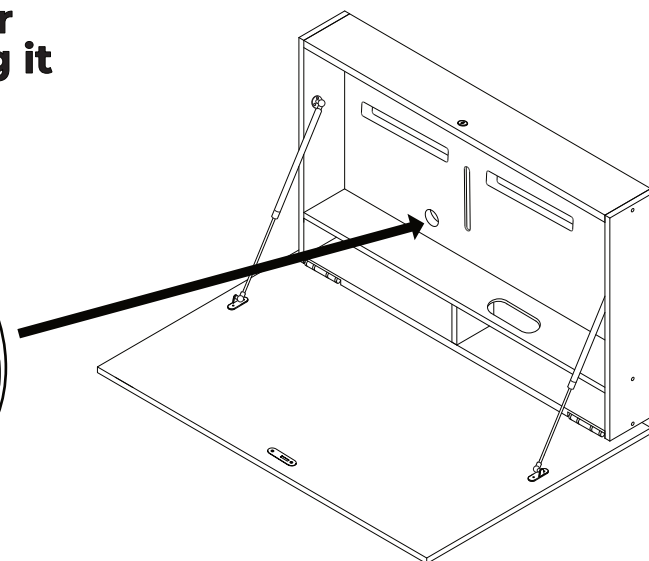

15

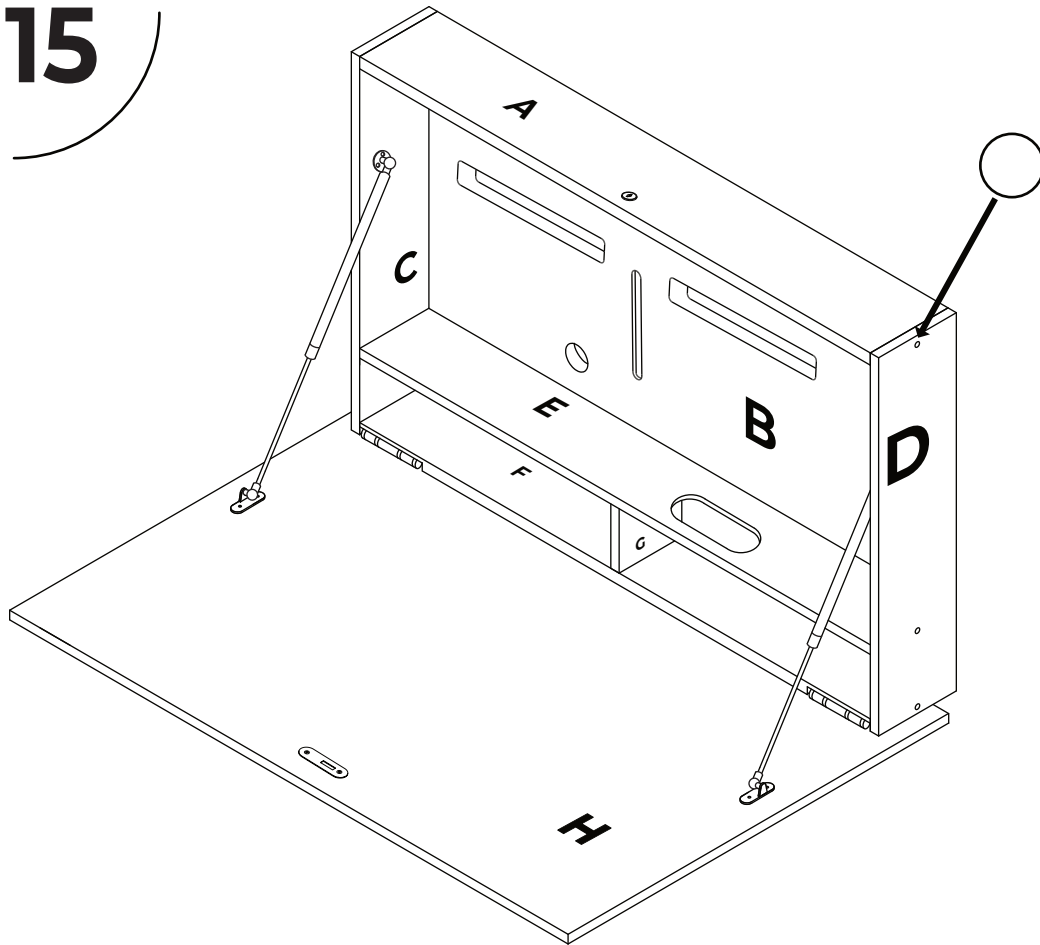





Matching colour cover cap stickers have been provided with your DropTop™

Place the provided colour-matched cover cap stickers over any exposed screws for a clean finish.



To install your monitor on a Slim or Tilt mount.

1

Your DropTop™ comes with either a Slim Monitor Mount or a Tilt Monitor Mount, depending on your chosen configuration.

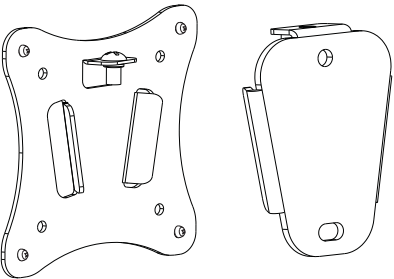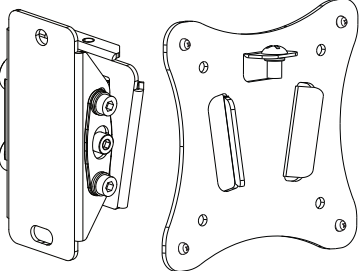Slim Monitor Mount			
			
Tilt Monitor Mount			
			



2

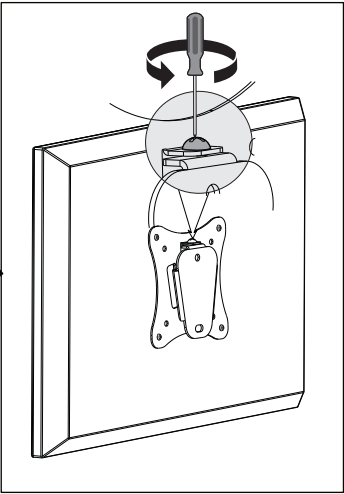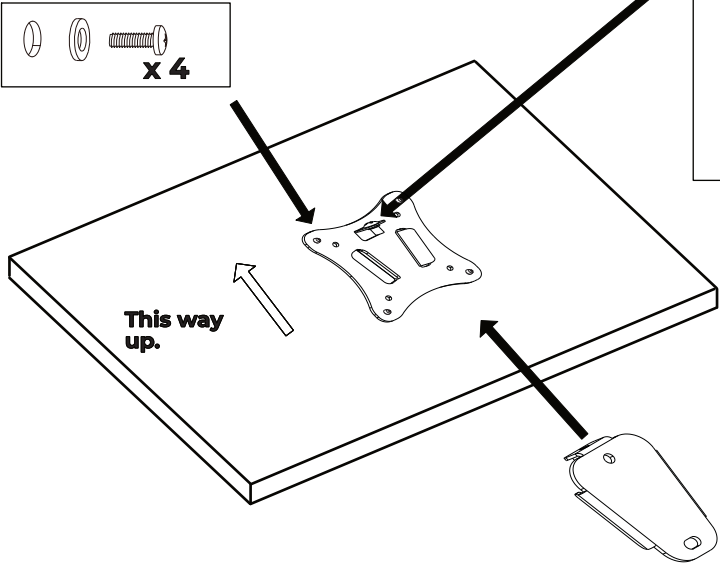

Fix the VESA plate to the monitor with the supplied screws.

3



Feed the power cable through the cable management cutout.

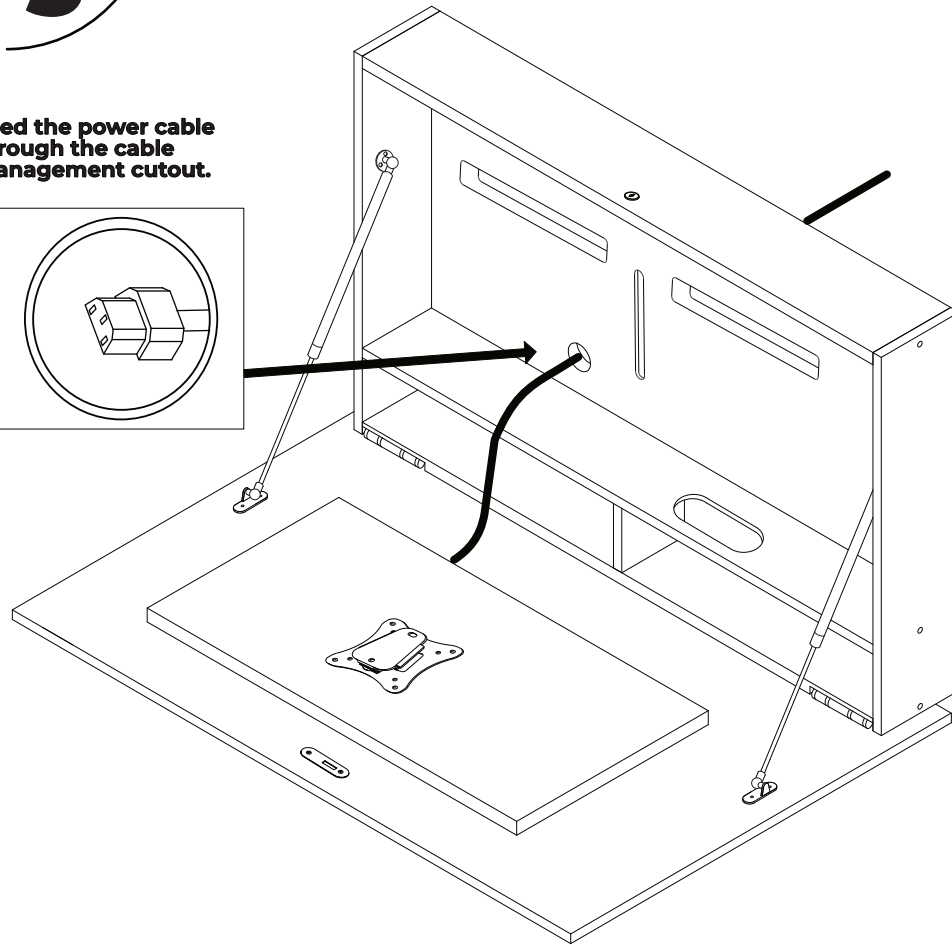

Place the monitor face down on the worktop. Feed the power cable through the round cable grommet at the back of panel B and plug it into your monitor.


4

Attach your selected cable to the monitor and pass it through the oval-shaped cable grommet on panel E.

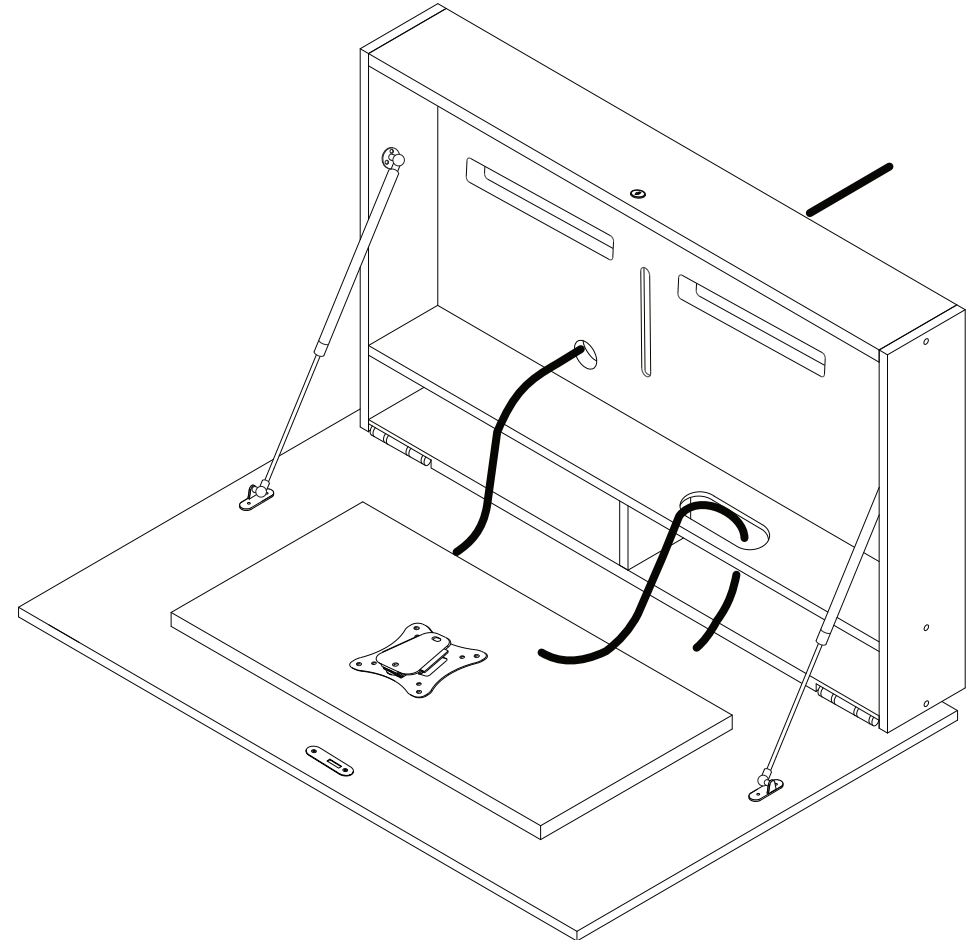


After cabling, reattach the central section to the round cable grommet.

5

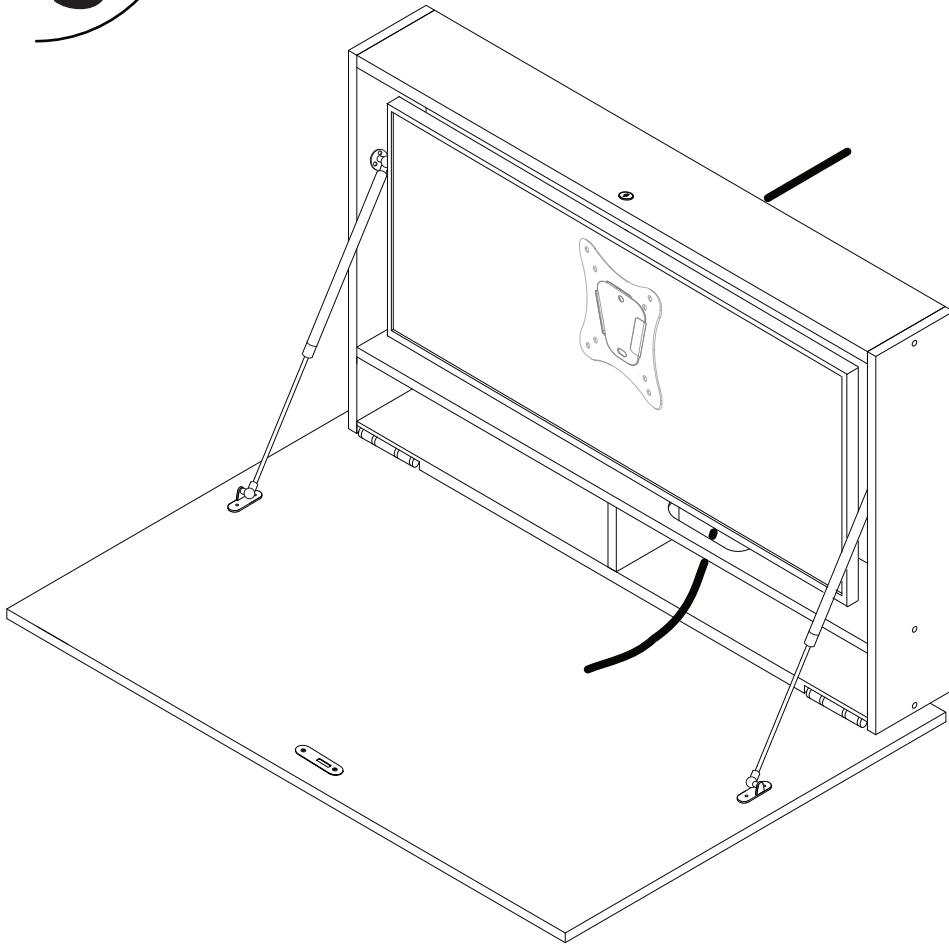

Place your monitor into the DropTop™ monitor space, ensuring cables are properly routed through.


6

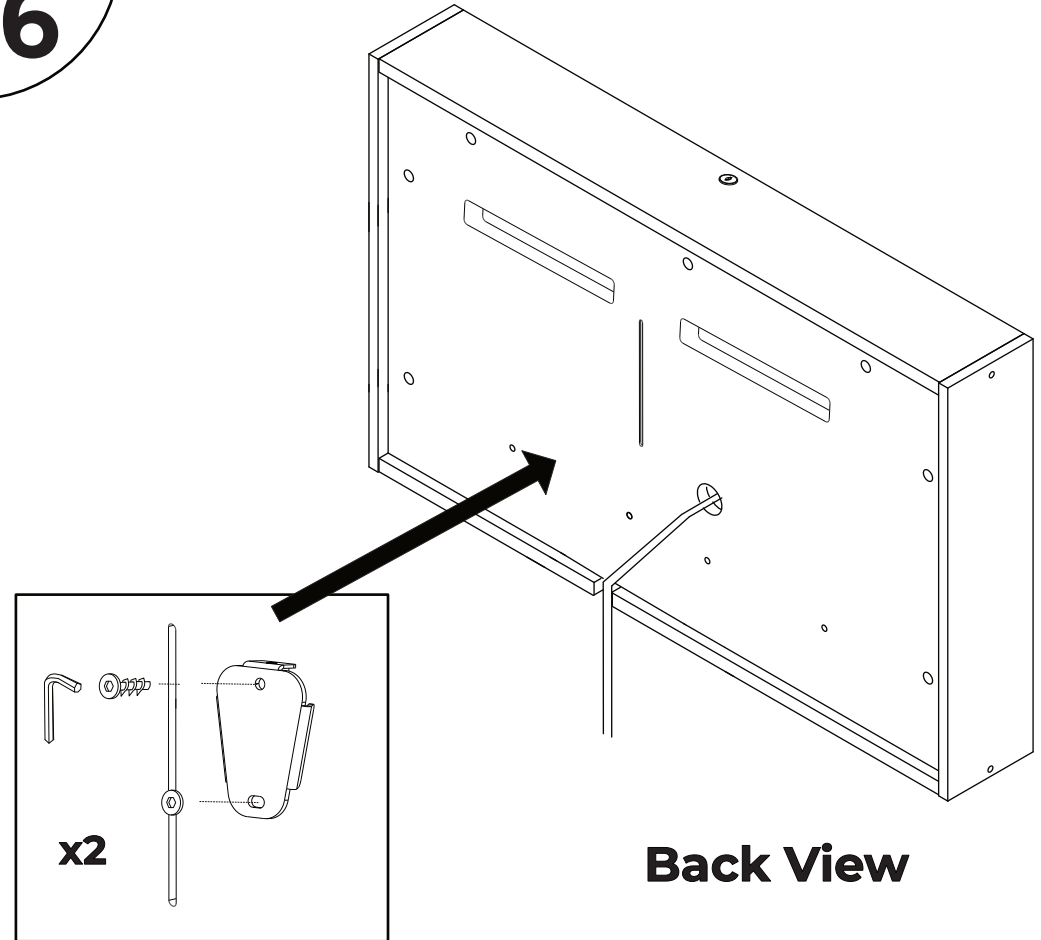


Secure the monitor from the front. At the back, insert and lightly screw the bolts to keep it in position. Fine-tune the height as needed, then fully tighten the bolts to firmly secure the monitor.

To install your monitor on an Extendable Arm Mount


1




**a -Wall Plate
&
Articulating
Arms(1)**




b-VESA Plate(1)



**c-
Wrench(1)**



d-Bolt(2)




f- M4 x12Bolt



**l-Cable
Tie(3)**




m-Allen Key(1)







2 x M6 Bolt




2

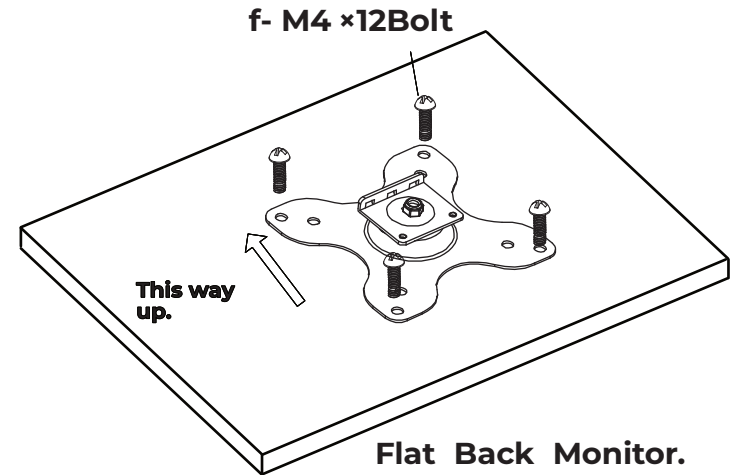

**Attach the VESA Plat-b to your monitors
using the provided screws.**

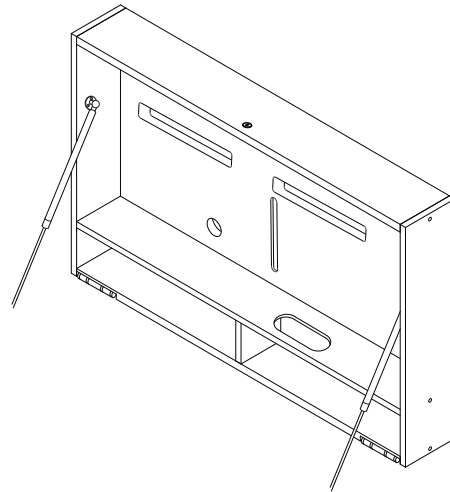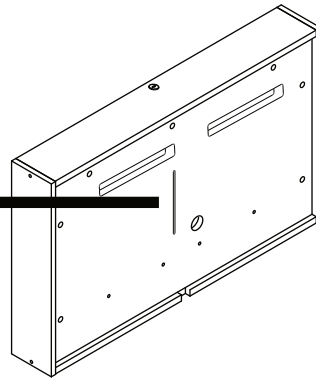3**Front View****Wall Plate &
Articulating Arms-
A****Back View**



Attach the Wall Plate & Articulating Arms-A to the VESA slot on the back of the DropTop, using the 2 x M6 bolts provided.

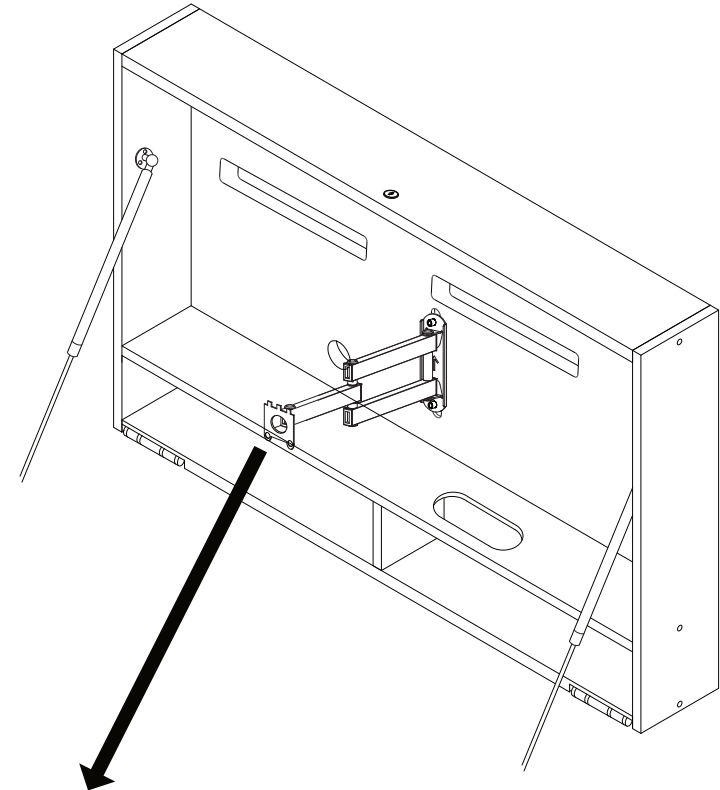4**Fully extend the articulating arms out.**

At this step, Ensure the extendable mount is the correct way up as illustrated.

5



Feed the power cable through the cable management cutout.

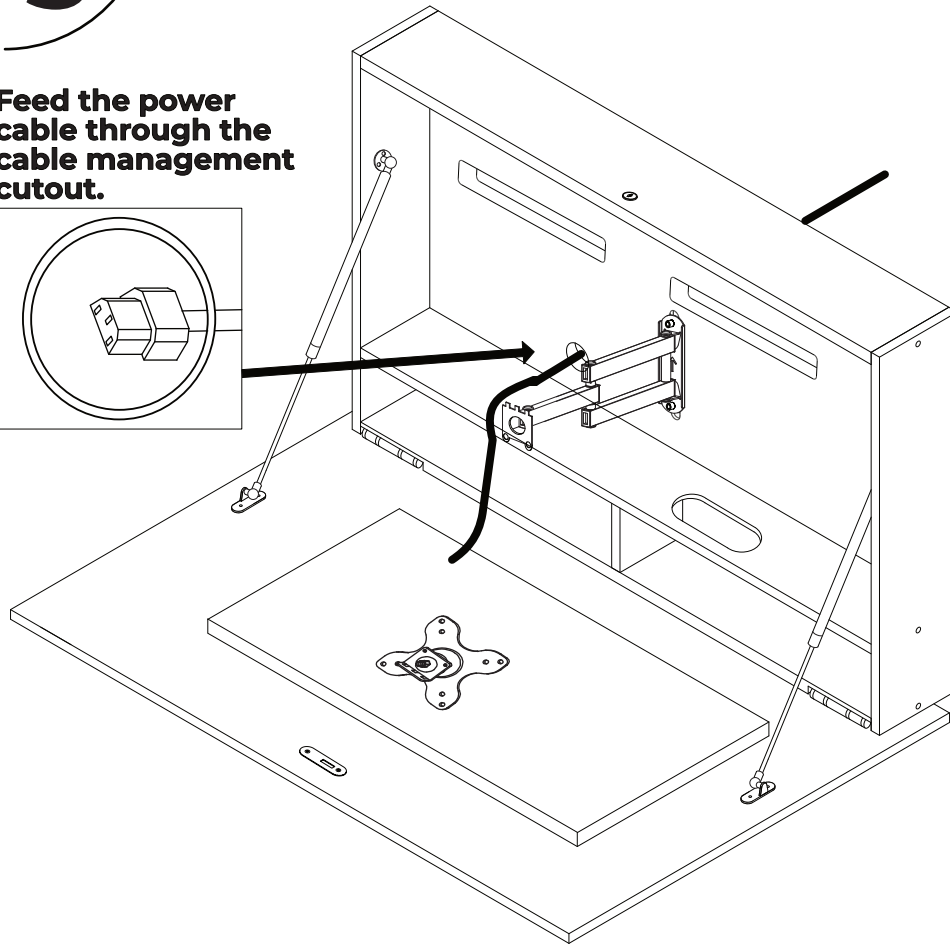

Place the monitor face down on the worktop. Feed the power cable through the round cable grommet at the back of panel B and plug it into your monitor.




6

Attach your selected cable to the monitor and pass it through the oval-shaped cable grommet on panel E.

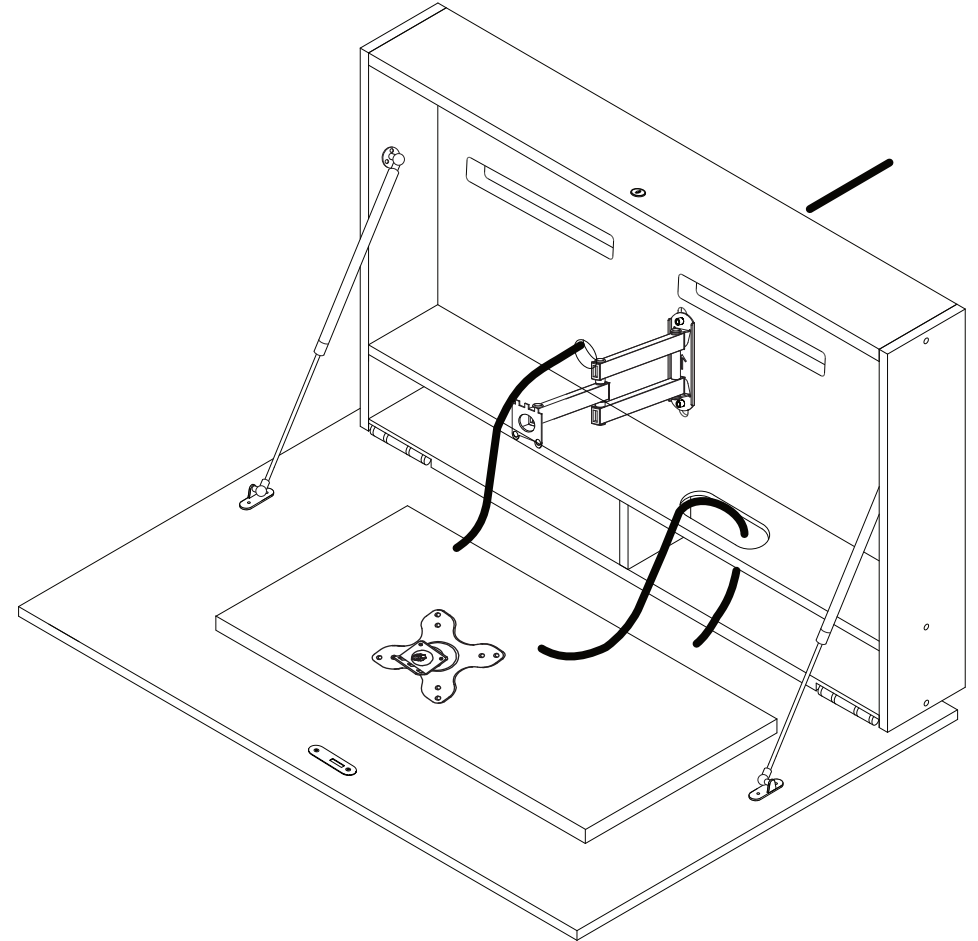


After cabling, reattach the central section to the round cable grommet.

7

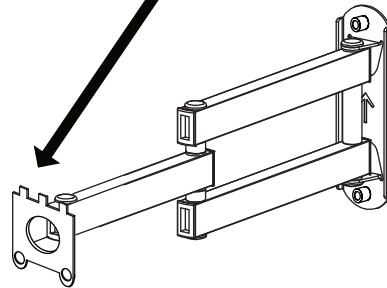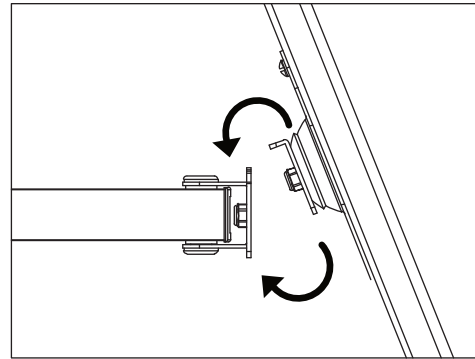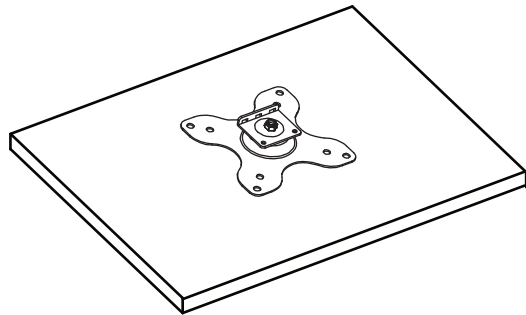


Hook the VESA Plate-b to the Socket on the fully extended arms.

8

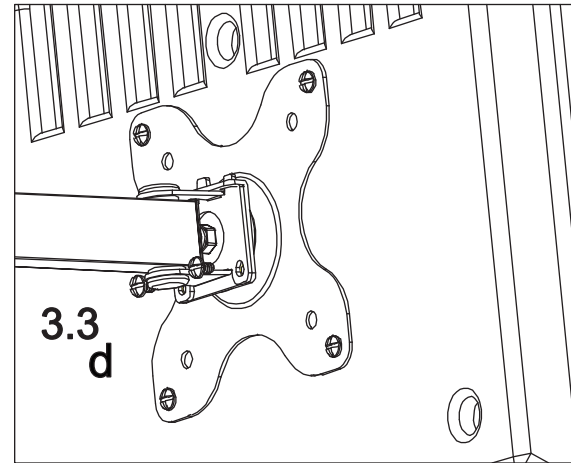


**2 x M4 Bolt -
d**

Secure the VESA Plate-b to the articulating arm using the 2x M4 Bolt-d provided.

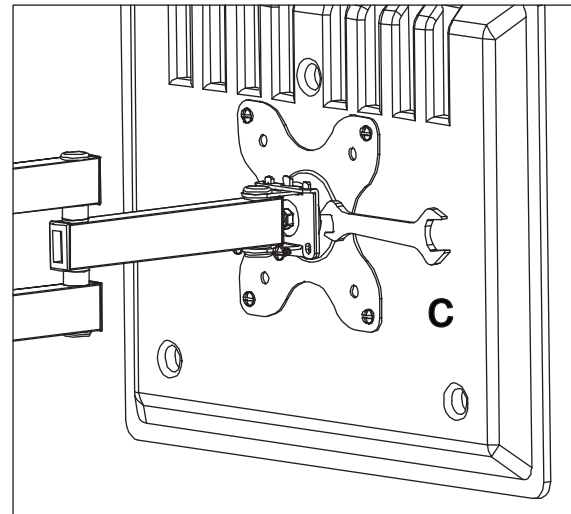


Use the wrench provided to adjust the tilting angle of the VESA Plate-b.

9

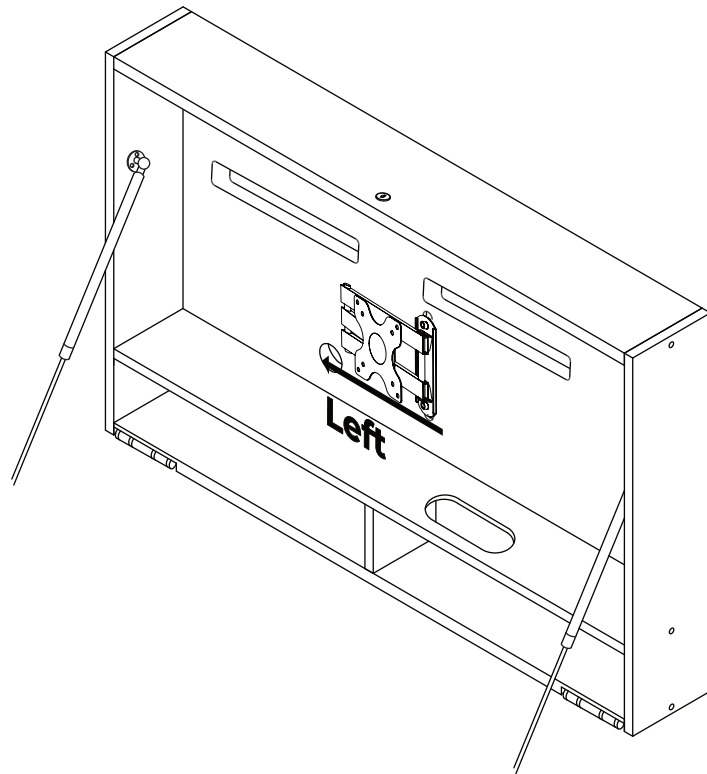


The mount brackets should be positioned as indicated in the diagram to ensure proper and mounting of the monitors.

10

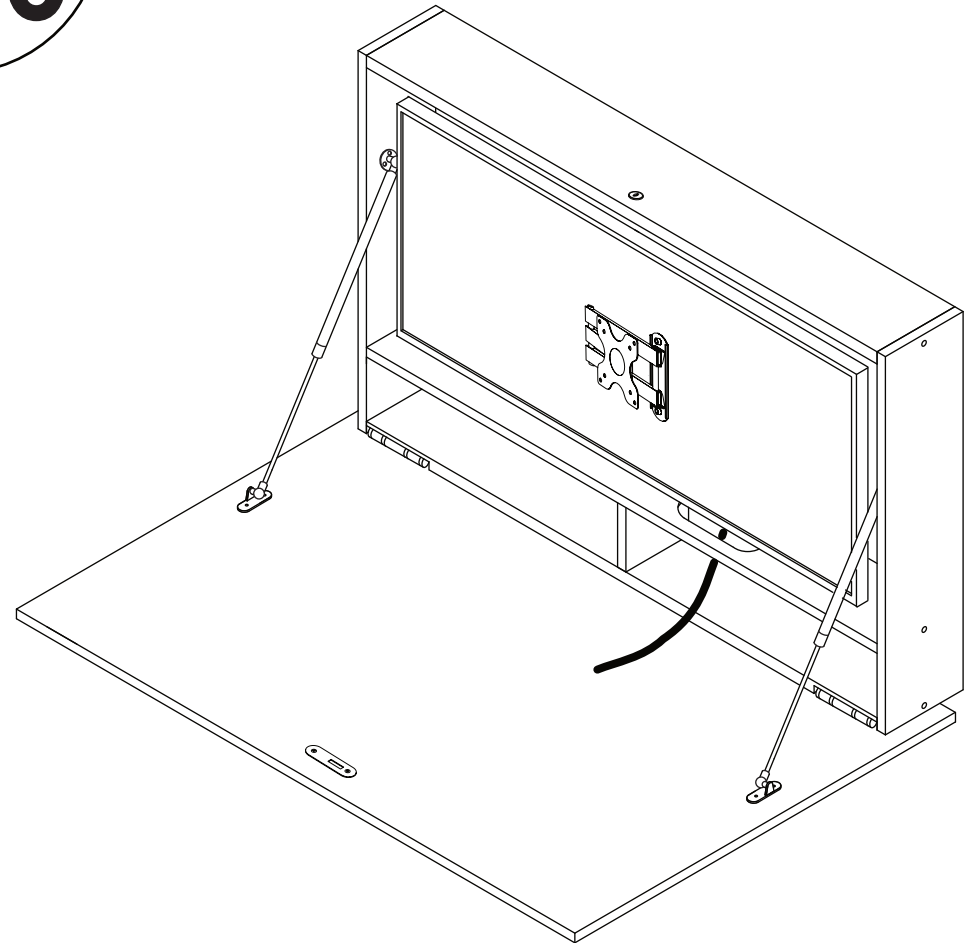


Place your monitor into the DropTop™ monitor space, ensuring cables are properly routed through.

11

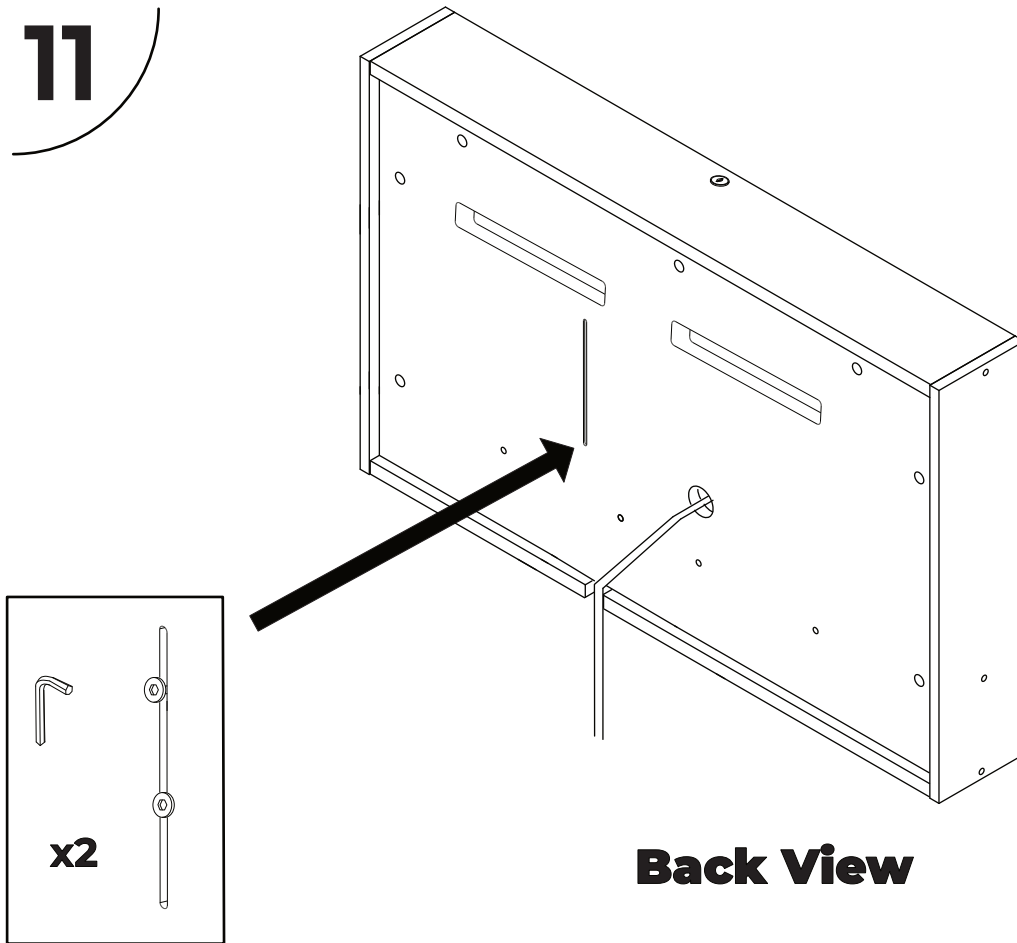



While securing the monitor from the front, slightly loosen the screws at the back and adjust the height as needed. Once the desired height is achieved, fully tighten the bolts to firmly secure the monitor.

Mounting the Wall plate.

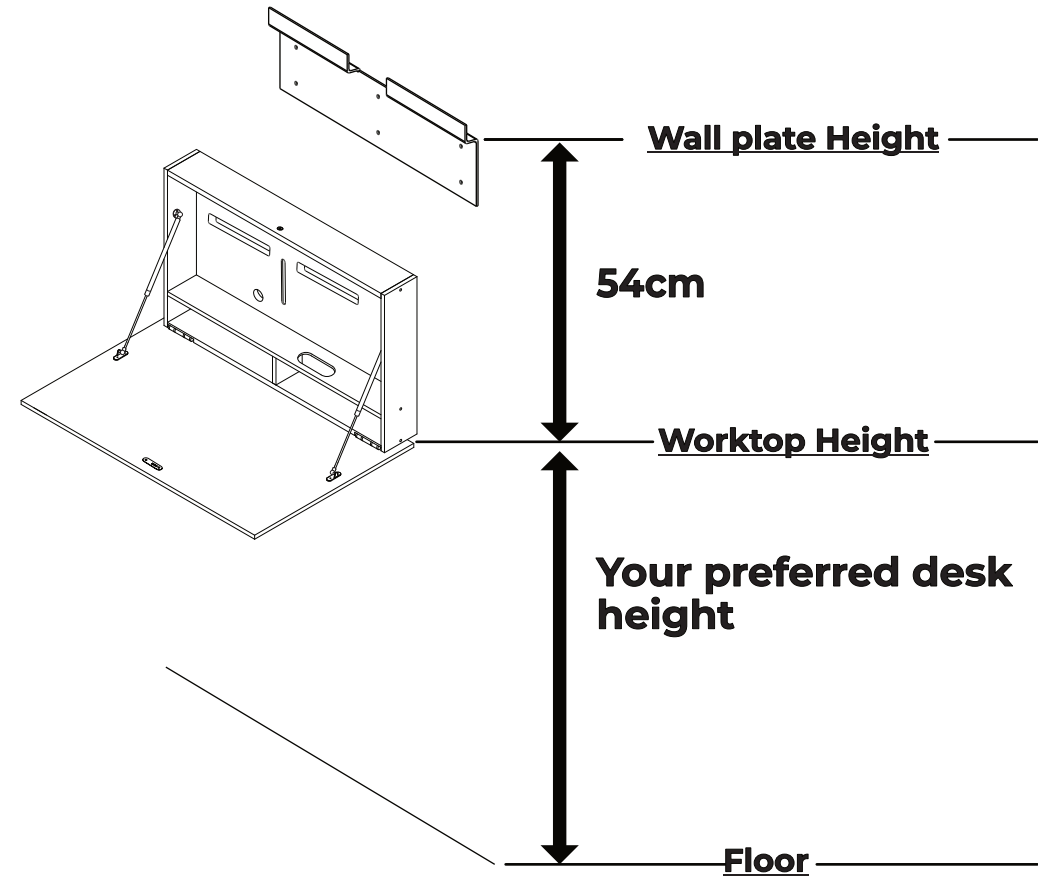

Your DropTop™ desk can be installed at any height that best suits your needs and preferences.


DropTop™ Max Light Wall plate height

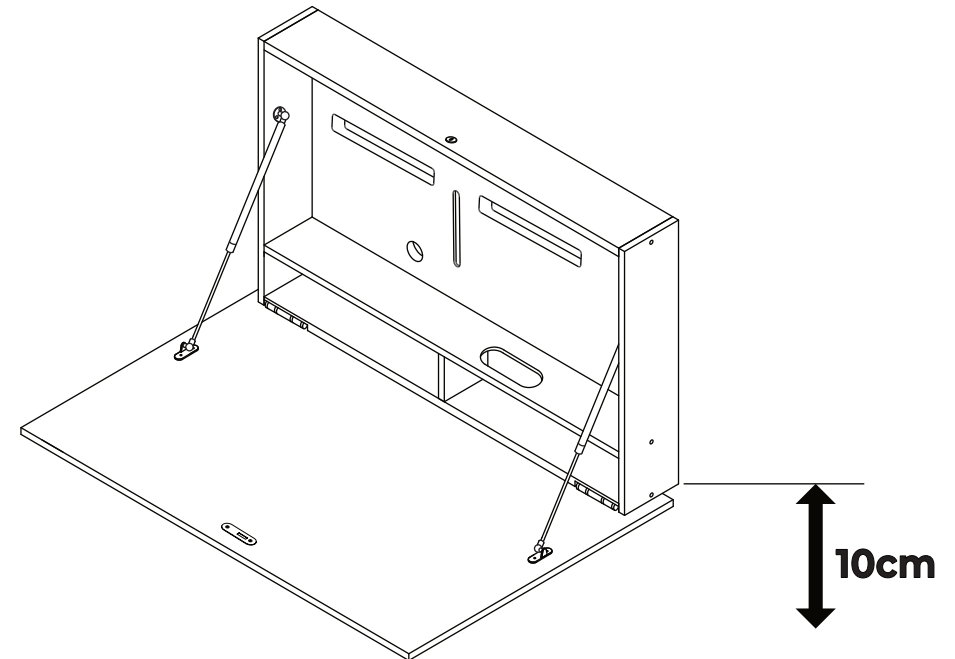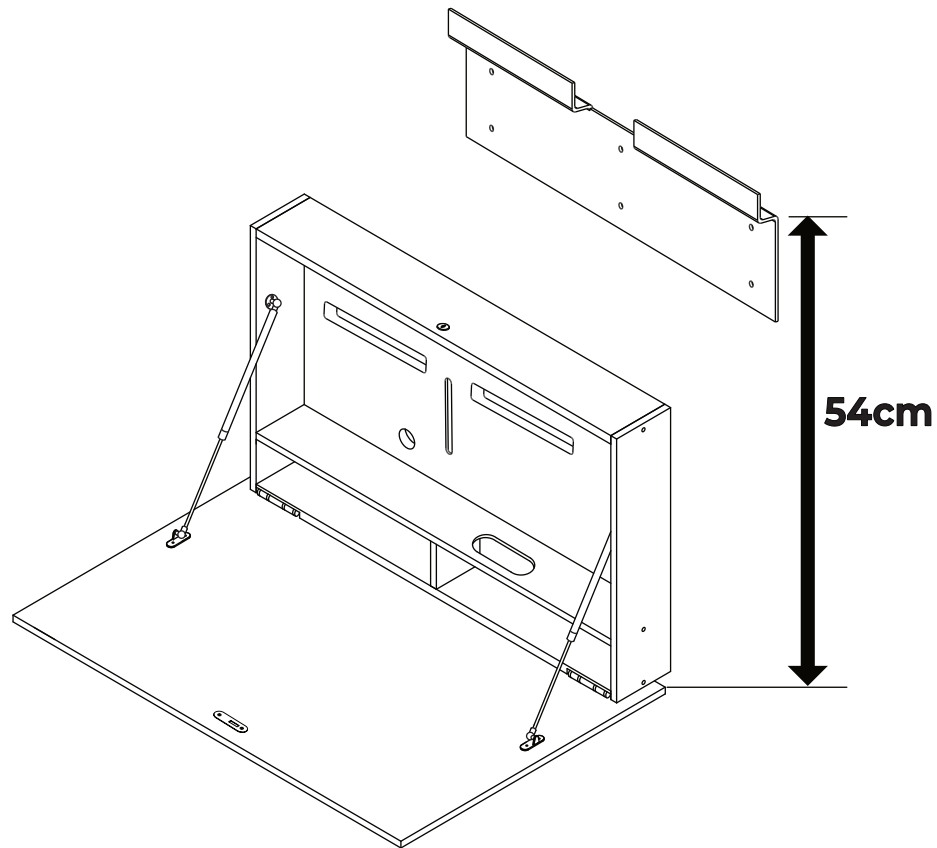

If you plan to mount the DropTop above an item, ensure there is 10 cm of clearance from the base of the DropTop™.

Installing on a brick and concrete wall.


1

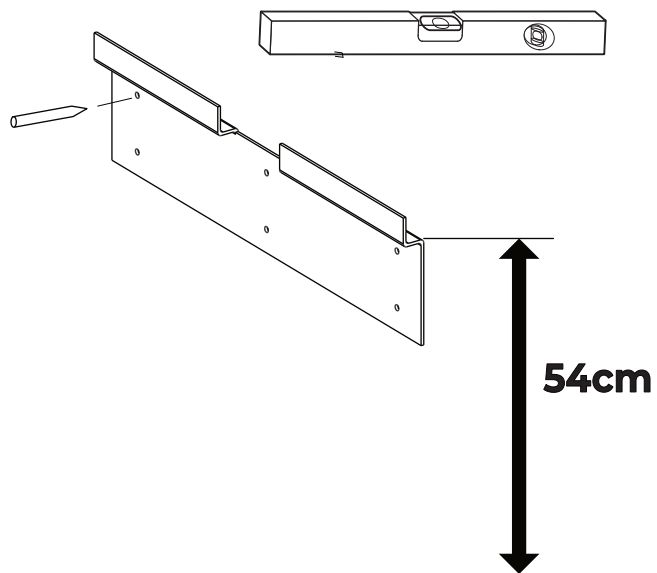

Use the wall plate as a guide and mark the position of the fixing holes with a pencil.


The height to install the wall plate should be measured from the top of the desired desk height to the top of the recessed area of the wall plate as previously explained.

2




Drill 6 x 8mm sized holes at a depth of 90mm (9cm).

3

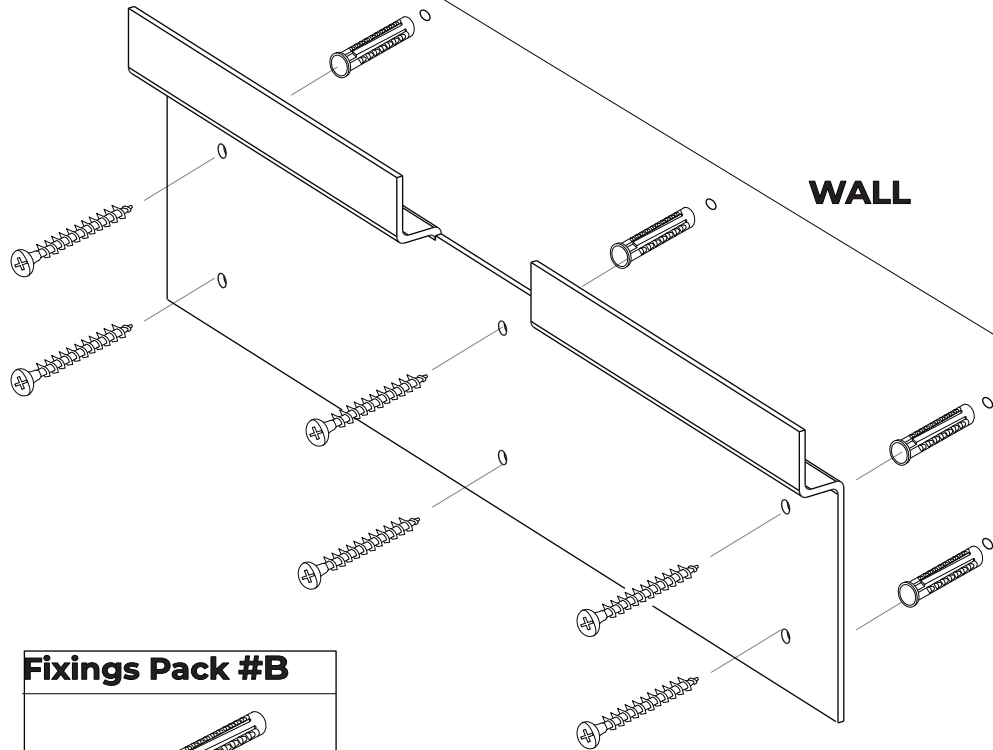


4

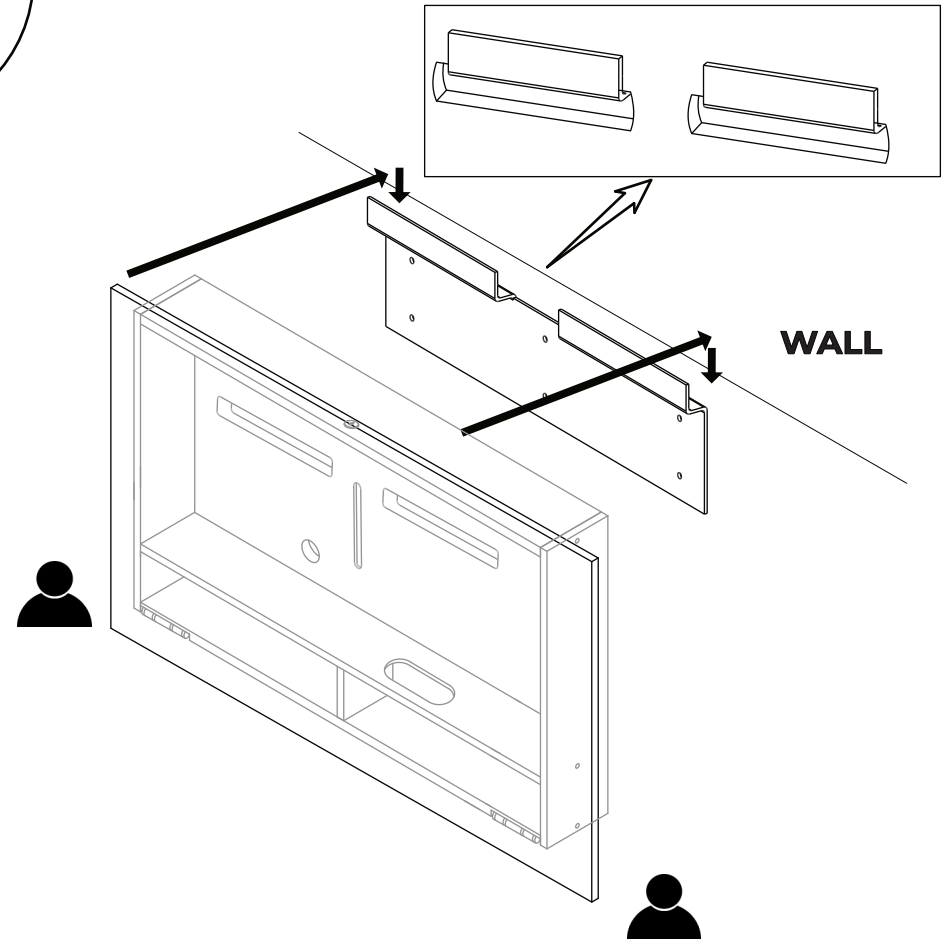

To safely mount the desk, ensure that the DropTop™ is locked before lifting it onto the wall plate. The DropTop™ should fit snugly in the recess of the wall plate.

Installing on Plasterboard/Drywall.


1

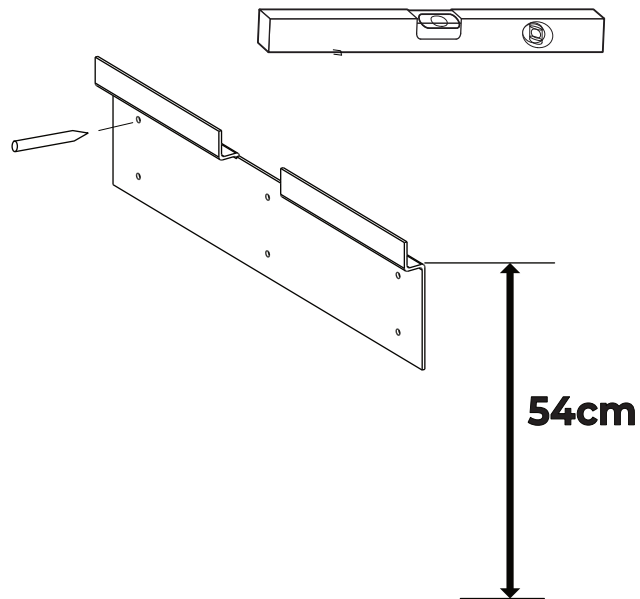

Use the wall plate as a guide and mark the position of the fixing holes with a pencil.

The height to install the wall plate should be measured from the top of the desired desk height to the top of the recessed area of the wall plate as previously explained.

2

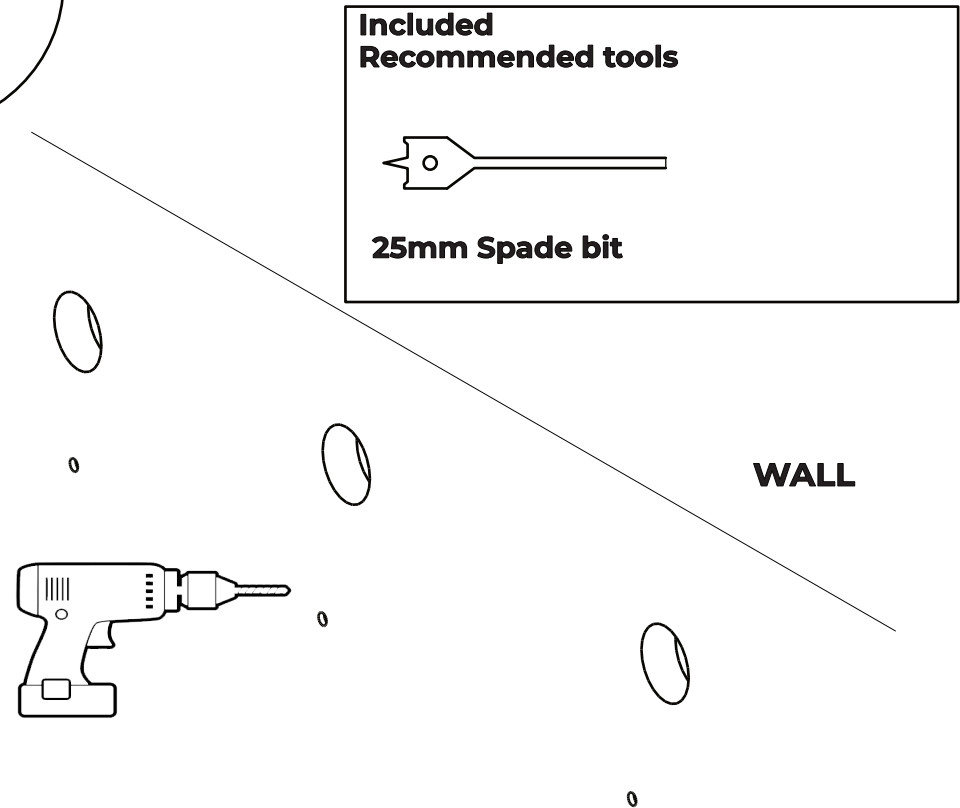


Using the 25mm Spade Bit, cut 3 holes of 25mm diameter centred on the top row of your wall plate pencil markings for the Geefix.


Drill 3 holes of 8mm diameter for the wall plugs.

3


GeeFix Fixings




Assemble your GeeFix wall anchor system by threading the supplied pullcord through the round wall plug, the curved back plate, and back through the wall plug.




While holding onto the pullcord, feed the curved back plate into the hole and centre on the 25mm hole.




While keeping light tension on the pullcord slide the wall plug into the 1" hole to align with the holes on the back plate




While keeping firm tension on the pullcord, screw the large screw into the centre hole until the GeeFix becomes firm, but do not over tighten. Keeping tension on the pullcord will keep the back plate in place during installation.



Pull out the pullcord but do not discard. You can use the same pullcord on additional GeeFix.




Screw in the 2 smaller screws on either side of the large screw and tighten until the GeeFix is firmly secured but do not over tighten.




Remove the centre screw

4

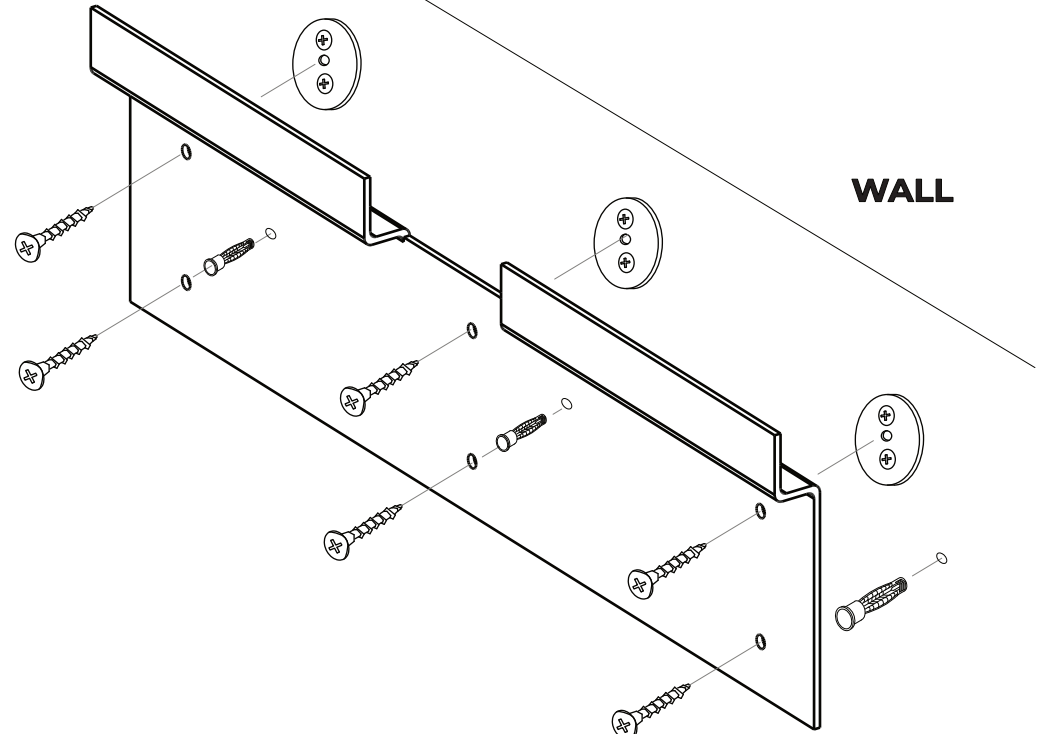


Fixings Pack #A




x6



x3



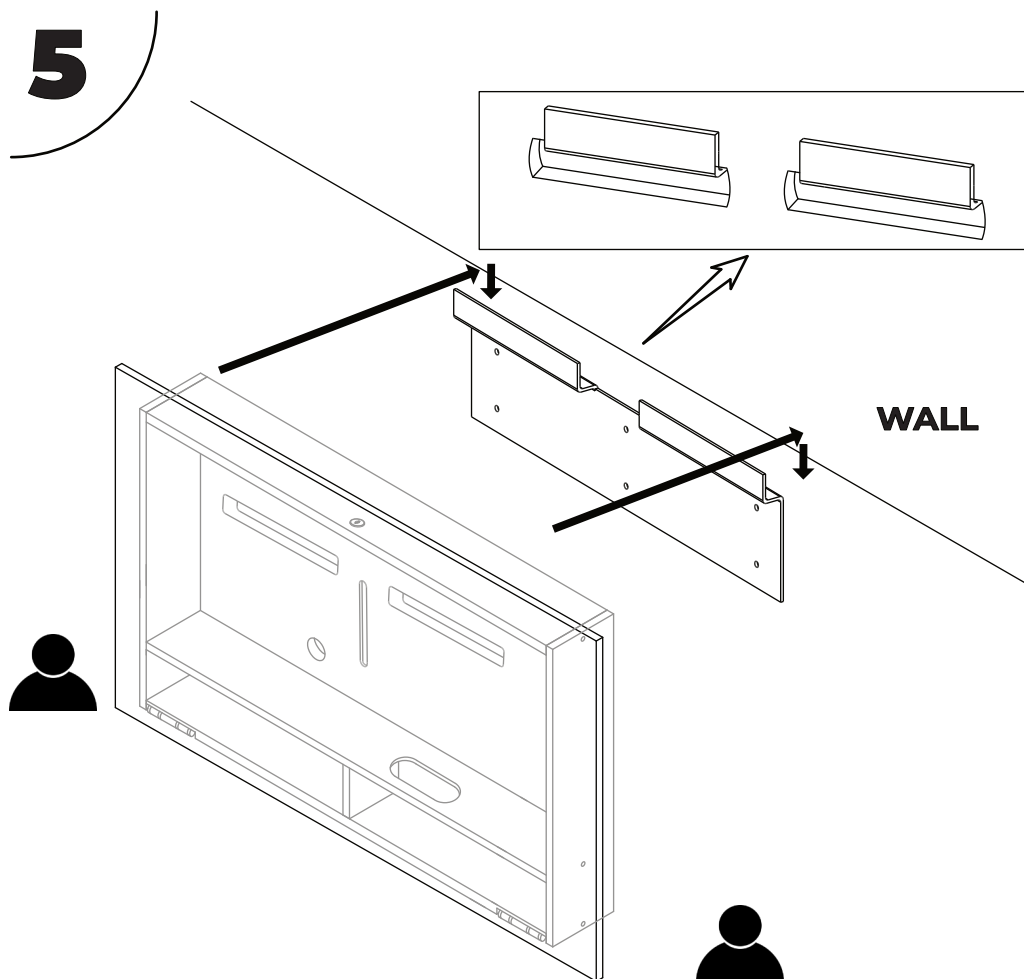


To safely mount the desk, ensure that the DropTop™ is locked before lifting it onto the wall plate. The DropTop™ should fit snugly in the recess of the wall plate.

|DropTop™ Max Light

Thank you for choosing to purchase your DropTop™ wall-mounted desk. We are delighted to have you as part of our community. You're taking a wonderful step towards improving your workspace and achieving a better work-life balance. We couldn't be more thrilled to support you in this journey.

Our team has put immense effort into designing and crafting the DropTop™ desk range to ensure it meets the highest standards of quality and functionality. We sincerely hope it transforms your workspace into a more productive and enjoyable environment.

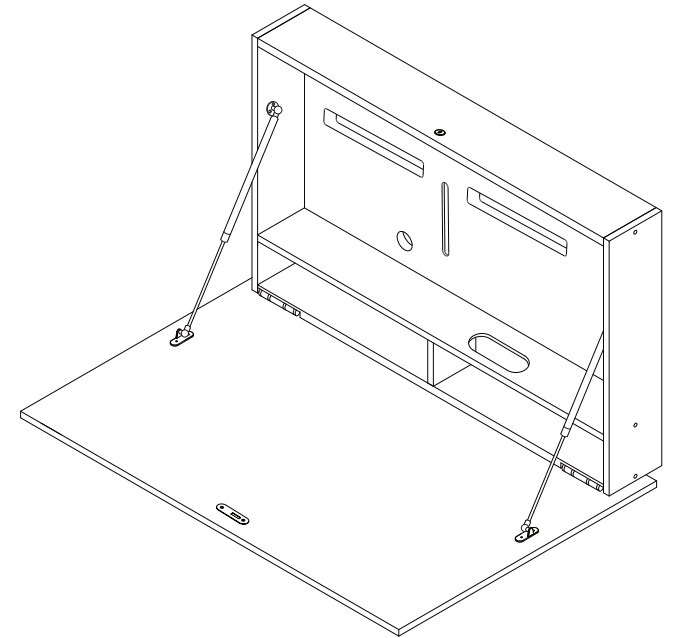

www.pithandstem.com